



Automation for a Changing World

# **Delta Fan/Pump Vector Control Drive CP2000 Series**



[www.deltaww.com](http://www.deltaww.com)

 **DELTA**  
Smarter. Greener. Together.

# WHY CP2000?

## Delta Industrial Automation Green Technology

Delta Industrial Automation introduces the CP2000 Series AC motor drive for energy-saving HVAC systems and for pump and fan applications. The CP2000 Series is equipped with special HVAC parameters and PID control functions for efficient operation, as well as multi-segment V/F control curve and soft start functions to assist frequent torque change and constant output applications with energy-saving performance.





# Water Circulation Pump Control

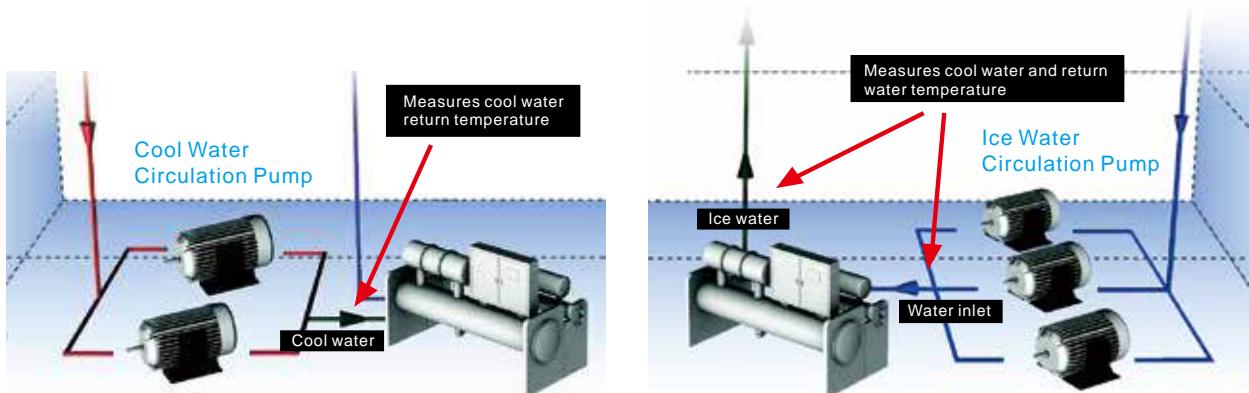


Figure 1: Multi-Pump Control

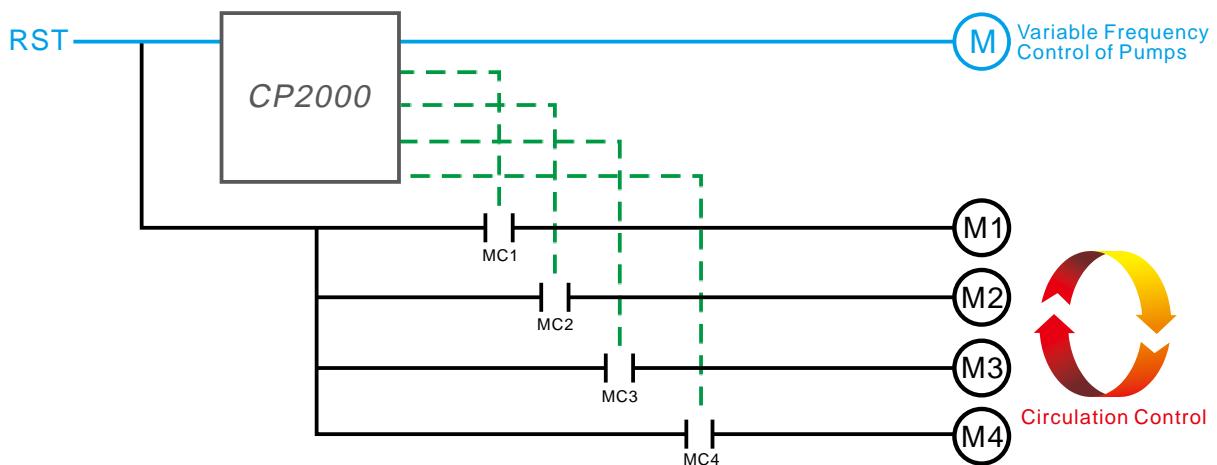


Figure 2: Fixed Amount and Circulation Control

## Features

- ▶ LCD keypad - An easy-to-use text panel with TP Editor software allows users to customize the main page screen
- ▶ Quick setting functions to support self-defined parameter groups and parameter duplication for fast and easy installation
- ▶ Modular design for flexible extension and easy maintenance
- ▶ High-speed communications include BACnet and Modbus. Optional communication cards are available upon purchase: PROFIBUS DP, PROFINET, DeviceNet, Modbus TCP, EtherNet/IP and CANopen
- ▶ Extended life cycle
- ▶ Enhanced conformal coating on PCBs for superior durability in critical environments
- ▶ Fire mode and bypass functions: continuous pressure to extract smoke when emergencies occur
- ▶ Various modes for fans/pump applications including PID control, sleep/wake up functions, flying start and skip frequency
- ▶ Multi-pumps synchronous control of up to 8 motors at one time and provides fixed amount and fixed time circulation control
- ▶ Built-in 10K steps PLC programming capacity and Real Time Clock (RTC)

# Advanced Drive Technology

## High Performance Variable Frequency Drive Technology

- 1.Sensorless Vector Control (SVC)
- 2.Dual rating design  
(Light duty & Normal duty)
- 3.Excellent variable torque control of asynchronous motors



## Modular Design

- 1.Hot pluggable LCD keypad
- 2.I/O extension card
- 3.Various communication cards
- 4.Removable fans

## Versatile Drive Control

- 1.Built-in PLC function
- 2.Built-in brake unit\*
- 3.Networking drive system
- 4.Auto energy saving

## Environmental Adaptability

- 1.50°C operation temperature
- 2.Built-in DC choke\*
- 3.Coated circuit boards
- 4.Built-in EMC filter\*
- 5.International safety standard  
CE/UL/cUL

\*Note: Please refer to the Product Specification for more details.

## Standard Models

**Power range: 230V 0.75~90kW, 460V 0.75~630kW**

230V (kW)	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90
230V (HP)	1	2	3	5	7.5	10	15	20	25	30	40	50	60	75	100	120
Frame Size	A				B				C				D		E	

460V (kW)	0.75	1.5	2.2	3.7	4.0	5.5	7.5	11	15	18.5	22	30	37			
460V (HP)	1	2	3	5	5	7.5	10	15	20	25	30	40	50			
Frame Size	A						B				C				D	

460V (kW)	45	55	75	90	110	132	160	185	220	280	315	355	400	500	560	630
460V (HP)	60	75	100	120	150	175	215	250	300	375	425	475	536	675	745	850
Frame Size	D0		D		E		F		G		H					

**Power range: 575V 1.5~15kW, 690V 18.5~630kW**

575V (kW)	1.5	2.2	3.7	5.5	7.5	11	15	
575V (HP)	2	3	5	7.5	10	15	20	
Frame Size	A			B				

690V (kW)	18.5	22	30	37	45	55	75	90	110	132	160	200	250	315		
690V (HP)	25	30	40	50	60	75	100	125	150	175	215	270	335	425		
Frame Size	C				D			E				F		G		

690V (kW)	400	450	560	630
690V (HP)	530	600	750	850
Frame Size	H			

# High-Speed Network

- ▶ Advanced network functions


- Built-in RS-485 (Modbus)
- Built-in BACnet MS/TP 

- ▶ Various communication card options

PROFINET, PROFIBUS DP, EtherNet/IP, DeviceNet, Modbus TCP, CANopen (DS402)


# Building Automation Applications

- ▶ 4-point adjustable V/F control - Real-time adjustment of output voltage under variable torque load environments, especially for pump and fan applications.
- ▶ Flying start and auto restart after momentary power loss functions, suitable for fan application.
- ▶ Skip frequency function avoids mechanical resonance and protects the equipment.
- ▶ Low-current protection function prevents free load operation.
- ▶ Built-in BACnet communication protocol saves wiring for building automation applications.

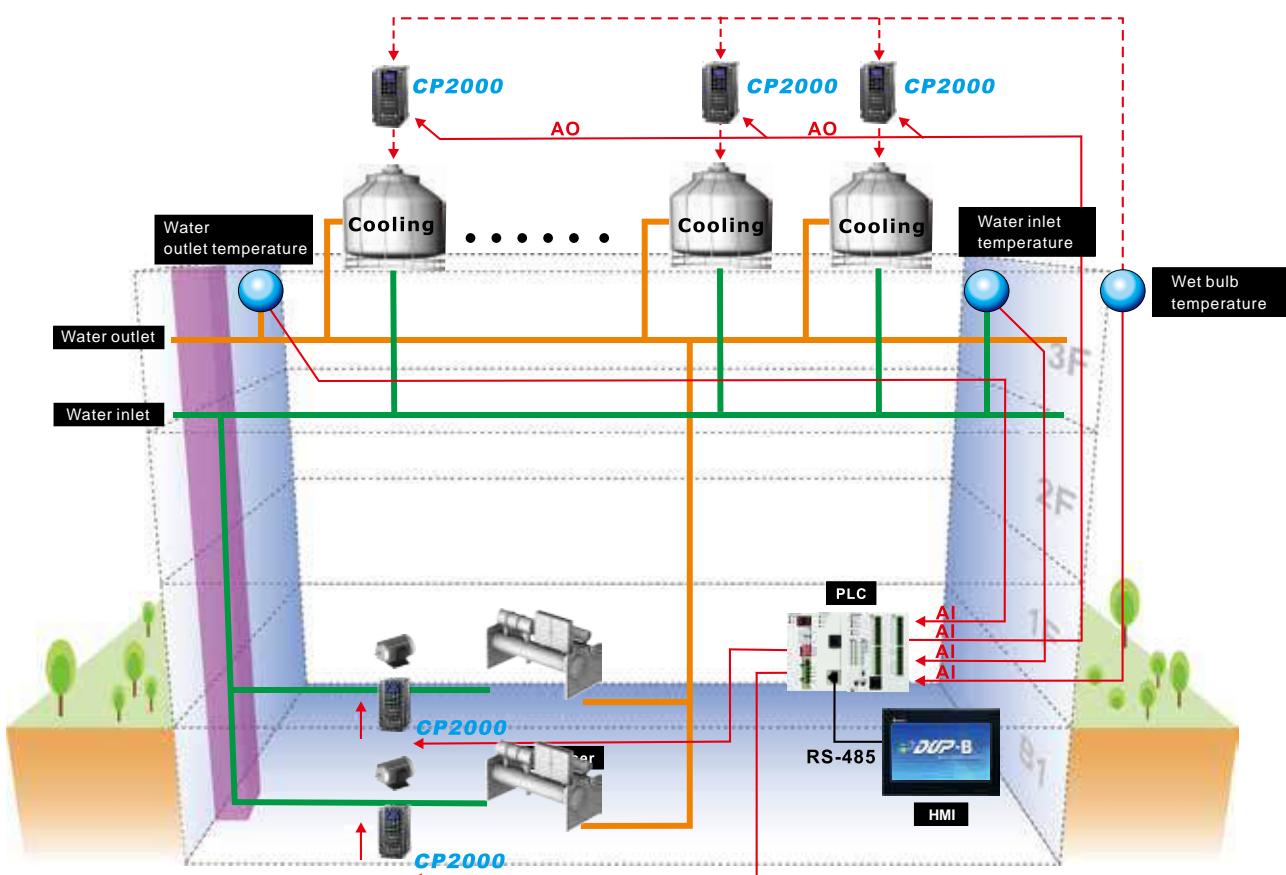


## Improves Motor Performance

- ▶ Sensorless Vector Control (SVC) and auto-tuning functions to improve motor performance for variable torque load applications.
- ▶ Deceleration Energy Backup (DEB) function decelerates motor to a stop when sudden power failure occurs to protect the equipment from damage.
- ▶ Auto adjusting acceleration/deceleration speed, reduces mechanical vibration when activating and stopping the equipment and provides smooth operation.
- ▶ Energy saving control functions include PID control, sleep/wakeup mode and auto-energy saving mode.

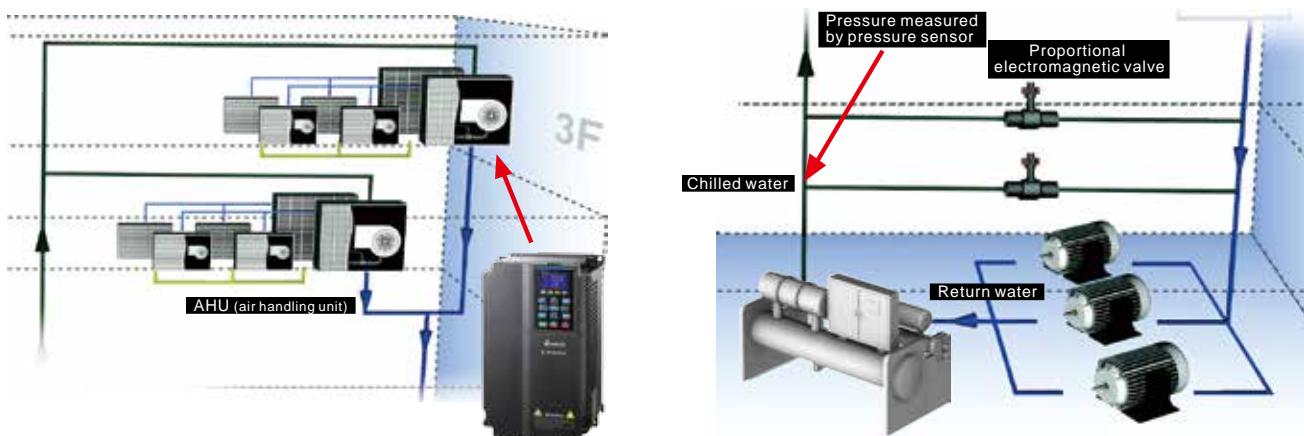

## Built-in PLC Function

- ▶ Built-in 10K steps PLC function supports independent and distributed control when connecting to a network system for high operation flexibility.
- ▶ Real Time Clock (RTC) function facilitates the PLC program writing process for ON/OFF chronology, daylight saving operation and many other settings.

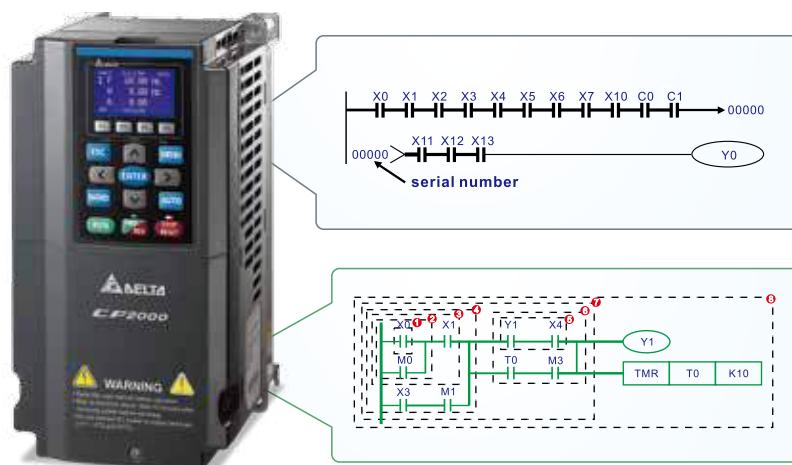

## Standards

■ CE Low Voltage: EN61800-5-1	EMC: EN61000-3-12, EN61800-3, IEC61000-6-2, IEC61000-6-4, IEC61000-4-2, IEC61000-4-3, IEC61000-4-4, IEC61000-4-5, IEC61000-4-6, IEC61000-4-8
■ UL, cUL	
■ RCM	
■ ROHS	

## Modular Design

Powerful motor drive control functions. The modular design satisfies various system applications with higher flexibility and is easy to maintain. Accessories include input/output extension cards, communication cards, hot pluggable LCD keypad, removable terminal blocks and removable fans.

- KPC-CC01 keypad
- Standard RJ45 cable for remote operation.
- Easy to install and remove with one press.



• RFI Jumper



- Remove the safety screws and press on both side tabs to remove the cover.



- The product nameplate shows the input/output voltage, input /output current, frequency range, and more.




- Modular fan design, easy to replace and clean, extending product life.



## High Adaptability to Environment

- ▶ Built-in DC choke to suppress harmonics\*
- ▶ Built-in EMC filter for noise suppression\*
- ▶ Enhanced conformal coating on PCBs for superior durability in critical environments.
- ▶ The electronic components of the drive are isolated from the cooling system to reduce heat interference. Dissipated heat can be discharged by flange-mounting installation, and forced fan cooling can import cold air into the heat sink. The heat dissipation performance is optimized by these two cooling methods.



Note: Please refer to the Product Specification for more detail

# Environment for Operation, Storage and Transportation

DO NOT expose the AC motor drive to harsh environments, such as dust, direct sunlight, corrosive/flammable gasses, humidity, liquid or vibrations. The salts in the air must be less than 0.01 mg/cm<sup>2</sup> per year.

Environment	<b>Installation Location</b>	IEC60364-1/IEC60664-1 Pollution degree 2, indoor use only	
	<b>Surrounding Temperature</b>	Storage / Transportation (°C)	-25 ~ 70
		Non-condensation, non-frozen	
	<b>Rated Humidity</b>	Operation	Max. 95%
		Storage / Transportation	Max. 95%
	No condense water		
	<b>Air Pressure</b>	Operation / Storage (kPa)	86 ~ 106
		Transportation (kPa)	70 ~ 106
	<b>Pollution Level</b>	IEC60721-3-3	
		Operation	Class 3C3; Class 3S2
		Storage	Class 1C2; Class 1S2
		Transportation	Class 2C2; Class 2S2
		If the AC motor drive is to be used under harsh environment with high level of contamination (e.g. dew, water, dust), make sure it is installed in an environment qualified for IP54 such as in a cabinet.	
	<b>Altitude</b>	Operation	If the AC motor drive is installed at an altitude of 0~1,000m, follow normal operation restrictions. If it is installed at altitude 1,000~2,000 m, decrease 1% of rated current or lower 0.5°C of temperature for every 100m increase in altitude. Maximum altitude for Corner Grounded TN system is 2,000m. For application over 2,000m, please contact Delta for more details.
	<b>Package Drop</b>	Storage / Transportation	ISTA procedure 1A (according to weight) IEC60068-2-31
	<b>Vibration</b>	1.0 mm, peak to peak value range from 2 Hz to 13.2 Hz; 0.7 G~1.0 G range from 13.2 Hz to 55 Hz; 1.0 G range from 55 Hz to 512 Hz. Comply with IEC 60068-2-6.	
	<b>Impact</b>	IEC/EN 60068-2-27	
	<b>Operation Position</b>	Max. allowed offset angle ±10° (under normal installation position)	

## Specification for Operation Temperature and Protection Level

Model	Frame	Top Cover	Conduit Box	Protection Level	OperationTemperature
VFDxxxxCP23x-21 VFDxxxxCP43x-21 VFDxxxxCP4Ex-21 VFDxxxxCP53x-21	Frame A~C 230V: 0.75~30 kW 460V: 0.75~37 kW 575V: 1.5~15 kW 690V: 18.5~37 kW	Remove top cover	Standard conduit plate	IP20/UL Open Type	30V & 460V: -10 °C~50 °C *1  575V & 690V: -10 °C~50 °C
		Standard with top cover		IP20/UL Type1/NEMA1	-10 °C~40 °C
VFDxxxxCP63x-xx	Frame D ~ H 230V: ≥ 37 kW 460V: ≥ 45 kW 690V: ≥ 45 kW	N/A	Conduit box	IP20/UL Type1/NEMA1	-10 °C~40 °C
VFDxxxxCP23x-00 VFDxxxxCP43x-00 VFDxxxxCP63x-00	Frame D ~ H 230V: ≥ 37 kW 460V: ≥ 45 kW 690V: ≥ 45 kW	N/A	No conduit box	IP00 IP20/UL Open Type  	230V & 460V: -10 °C~50 °C *1  690V: -10 °C~50 °C

\*1 When the carrier wave for light duty is 2kHz, the maximum operation temperature can reach up to 50 °C

# Specifications

230 V																																
Frame Size		A					B				C			D		E																
<b>Model VFD-□□□□CP23□-□□</b>		007	015	022	037	055	075	110	150	185	220	300	370	450	550	750	900															
Output Rating	LIGHT DUTY	Rated Output Capacity (kVA)	2.0	3.0	4.0	6.0	8.4	12	18	24	30	36	42	58	72	86	110	128														
		Rated Output Current (A)	5	7.5	10	15	21	31	46	61	75	90	105	146	180	215	276	322														
		Applicable Motor Output (kW)	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90														
		Applicable Motor Output (HP)	1	2	3	5	7.5	10	15	20	25	30	40	50	60	75	100	120														
		Overload Tolerance	120% of rated current for 1 minute during every 5 minutes																													
	NORMAL DUTY	Max. output frequency (Hz)	599.00											400.00																		
		Carrier frequency (kHz)	2~15 (default setting 8)								2~10 (default setting 6)				2~9 (default setting 4)																	
		Rated Output Capacity (kVA)	1.2	2.0	3.2	4.4	6.8	10	13	20	26	30	36	48	58	72	86	102														
		Rated Output Current (A)	3	5	8	11	17	25	33	49	65	75	90	120	146	180	215	255														
		Applicable Motor Output (kW)	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11	15	19	22	30	37	45	55	75														
		Applicable Motor Output (HP)	0.5	1	2	3	5	7.5	10	15	20	25	30	40	50	60	75	100														
Input Rating	OVERLOAD	Overload Tolerance	120% of rated current for 1 minute during every 5 minutes; 160% of rated current for 3 seconds during every 25 seconds																													
		Max. output frequency (Hz)	599.00											400.00																		
		Carrier frequency (kHz)	2~15 (default setting 8)								2~10 (default setting 6)				2~9 (default setting 4)																	
		Input Current (A) Light Duty	6.4	9.6	15	22	25	35	50	65	83	100	116	146	180	215	276	322														
		Input Current (A) Normal Duty	3.9	6.4	12	16	20	28	36	52	72	83	99	124	143	171	206	245														
	INPUT	Rated Voltage/Frequency	3-phase, 200~240V <sub>AC</sub> (-15%~+10%), 50/60Hz																													
		Operating Voltage Range	170~264V <sub>AC</sub>																													
		Frequency Tolerance	47~63Hz																													
		Efficiency (%)	97.8											98.2																		
		Power Factor	>0.98																													
Weight (Kg)		2.6 ± 0.3				5.4 ± 1				9.8 ± 1.5			38.5 ± 1.5		64.8 ± 1.5																	
Cooling Method		Natural Cooling	Fan Cooling																													
Braking Chopper		Frame A, B, C, Built-in											Frame D and above: Optional																			
DC Choke		Frame A, B, C, Optional											Frame D and above: Built-in 3%																			
EMC Filter		Optional																														
460 V																																
Frame Size		A					B				C			D		D0																
<b>Models VFD-□□□□CP43□-□□</b> <b>VFD-□□□□CP4E□-□□</b>		007	015	022	037	040	055	075	110	150	185	220	300	370	450	550																
Output Rating	LIGHT DUTY	Rated Output Capacity (kVA)	2.4	3.3	4.4	6.8	8.4	10.4	14.3	19	25	30	36	48	58	73	88															
		Rated Output Current (A)	3	4.2*	5.5*	8.5*	10.5	13*	18*	24*	32*	38*	45	60*	73*	91	110															
		Applicable Motor Output (kW)	0.75	1.5	2.2	3.7	4.0	5.5	7.5	11	15	18.5	22	30	37	45	55															
		Applicable Motor Output (HP)	1	2	3	5	5	7.5	10	15	20	25	30	40	50	60	75															
		Overload Tolerance	120% of rated current for 1 minute during every 5 minutes																													
	NORMAL DUTY	Max. Output Frequency (Hz)	599.00											2~10 (default setting 6)																		
		Carrier Frequency (kHz)	2~15 (default setting 8)								2~10 (default setting 6)				2~9 (default setting 4)																	
		Rated Output Capacity (kVA)	2.2	2.4	3.2	4.8	7.2	8.4	10.4	14.3	19	25	30	36	48	58	73															
		Rated Output Current (A)	1.7	3.0	4.0	6.0	9.0	10.5	12	18	24	32	38	45	60	73	91															
		Applicable Motor Output (kW)	0.4	0.75	1.5	2.2	3.7	4.0	5.5	7.5	11	15	18.5	22	30	37	45															
	OVERLOAD	Applicable Motor Output (HP)	0.5	1	2	3	5	5	7.5	10	15	20	25	30	40	53	60															
		Overload Tolerance	120% of rated current for 1 minute during every 5 minutes; 160% of rated current for 3 seconds during every 25 seconds																													
		Max. Output Frequency (Hz)	599.00											2~10 (default setting 6)																		
		Carrier Frequency (kHz)	2~15 (default setting 8)								2~10 (default setting 6)				2~9 (default setting 4)																	
		Input Current (A) Light Duty	4.3	6.0	8.1	12.4	16	20	22	26	35	42	50	66	80	91	110															
Input Current (A) Normal Duty		3.5	4.3	5.9	8.7	14	15.5	17	20	26	35	40	47	63	74	101																
Rated Voltage/Frequency		3-phase, 380~480V <sub>AC</sub> (-15%~+10%), 50/60Hz																														
Operating Voltage Range		323~528V <sub>AC</sub>																														
Frequency Tolerance		47~63Hz																														
Efficiency (%)		97.8											98.2																			
Power Factor		>0.98																														
Weight (Kg)		2.6 ± 0.3				5.4 ± 1				9.8 ± 1.5			27 ± 1																			
Cooling Method		Natural cooling	Fan cooling																													
Braking Chopper		Frame A, B, C, Built-in; Frame D and above, Optional											Frame D and above, Optional																			
DC Choke		Frame A, B, C, Optional; Frame D and above, Built-in 3%											Frame A, B, C of VFD____CP4EA_-___. Built-in																			
EMC Filter		Frame A, B, C of VFD____CP4EA_-___. No built-in											Frame D above, Optional																			

\* It means the rated output current is for the models of version B. (e.g. VFD015CP43B-21)

460 V																							
Frame Size		D		E		F		G		H													
Model VFD-□□□CP43□-□		750	900	1100	1320	1600	1850	2200	2800	3150	3550	4000	5000	5600	6300								
Output Rating	LIGHT DUTY	Rated Output Capacity (kVA)	120	143	175	207	247	295	367	422	491	544	613	773	872	966							
		Rated Output Current (A)	150*	180	220	260*	310	370*	460	530	616	683	770	930	1094	1212							
		Applicable Motor Output (kW)	75	90	110	132	160	185	220	280	315	355	400	500	560	630							
		Applicable Motor Output (HP)	100	120	150	175	215	250	300	375	425	475	536	675	745	850							
	NORMAL DUTY	Overload Tolerance	120% of rated current for 1 minute during every 5 minutes																				
		Max. output frequency (Hz)	599.00	400.00																			
		Carrier frequency (kHz)	2 ~ 10 (default setting 6)	2 ~ 9 (default setting 4)																			
		Rated Output Capacity (kVA)	88	120	143	175	207	247	295	367	438	491	544	720	741	872							
Input Rating	NORMAL DUTY	Rated Output Current (A)	110	150	180	220	260	310	370	460	550	616	683	866	930	1094							
		Applicable Motor Output (kW)	55	75	90	110	132	160	185	220	280	315	355	450	500	560							
		Applicable Motor Output (HP)	75	100	125	150	175	215	250	300	375	425	475	600	675	850							
		Overload Tolerance	120% of rated current for 1 minute during every 5 minutes; 160% of rated current for 3 seconds during every 25 seconds																				
	LIGHT DUTY	Max. output frequency (Hz)	599.00	400.00																			
		Carrier frequency (kHz)	2 ~ 10 (default setting 6)	2 ~ 9 (default setting 4)																			
		Input Current (A) Light Duty	150	180	220	260	310	370	460	530	616	683	770	930	1094	1212							
		Input Current (A) Normal Duty	114	157	167	207	240	300	380	400	494	555	625	866	930	1094							
Rated Voltage/Frequency		3-phase, 380~480V <sub>AC</sub> (-15%~+10%), 50/60Hz																					
Operating Voltage Range		323~528V <sub>AC</sub>																					
Frequency Tolerance		47~63Hz																					
Efficiency (%)		97.8	98.2																				
Power Factor		>0.98																					
Weight (Kg)		38.5 ± 1.5	64.8 ± 1.5	86.5 ± 1.5	134 ± 4	228																	
Cooling Method		Fan cooling																					
Braking Chopper		Frame D above, Optional																					
DC Choke		Frame D above, Built-in, 3%																					
EMC Filter		Frame D above, Optional																					

\* It means the rated output current is for the models of Version B. (e.g. VFD015CP43B-21)

575 V																			
Frame Size		A				B													
Model VFD-□□□C53A-21		015	022	037		055	075	110	150										
Output *	LIGHT DUTY	Rated Output Capacity (kVA)	3	4.3	6.7	9.9	12.1	18.6	24.1										
		Rated Output Current (A)	3	4.3	6.7	9.9	12.1	18.7	24.2										
		Applicable Motor Output (kW)	1.5	2.2	3.7	5.5	7.5	11	15										
		Applicable Motor Output (HP)	2	3	5	7.5	10	15	20										
	NORMAL DUTY	Rated Output Capacity (kVA)	2.5	3.6	5.5	8.2	10	15.4	19.9										
		Rated Output Current (A)	2.5	3.6	5.5	8.2	10	15.4	20										
		Applicable Motor Output (kW)	0.75	1.5	2.2	3.7	5.5	7.5	11										
		Applicable Motor Output (HP)	1	2	3	5	7.5	10	15										
Carrier Frequency (kHz)		2~9 (default setting 4)																	
Input Current (A) Light Duty		3.8	5.4	10.4	14.9	16.9	21.3	26.3											
Input Current (A) Normal Duty		3.1	4.5	7.2	12.3	15	18	22.8											
Rated Voltage/Frequency		3-Phase, 525~600V <sub>AC</sub> (-15%~+10%), 50/60Hz																	
Operating Voltage Range		446~660V <sub>AC</sub>																	
Frequency Tolerance		47~63Hz																	
Efficiency (%)		97				98													
Power Factor		>0.98																	
AC Drive Weight (Kg)		3±0.3				4.8±1													
Cooling Method		Natural cooling				Fan cooling													
Braking Chopper		Built-in																	
DC Choke		Optional																	

690V												
Frame Size		C			D		E					
Model VFD-□□□CP63A-□□		185	220	300	370	450	550	750	900	1100	1320	
Output *	LIGHT DUTY	Rated Output Capacity (kVA)	29	36	43	54	65	80	103	124	149	179
		Applicable Motor Output (690V, kW)	18.5	22	30	37	45	55	75	90	110	132
		Applicable Motor Output (690V, HP)	25	30	40	50	60	75	100	125	150	175
		Applicable Motor Output (575V, HP)	20	25	30	40	50	60	75	100	125	150
		Rated Output Current (A)	24	30	36	45	54	67	86	104	125	150
	NORMAL DUTY	Overload tolerance	120% of rated current for 1 minute during every 5 minutes									
		Max.output frequency (Hz)	599.00									
		Rated Output Capacity (kVA)	24	29	36	43	54	65	80	103	124	149
		Applicable Motor Output (690V, kW)	15	18.5	22	30	37	45	55	75	90	110
		Applicable Motor Output (690V, HP)	20	25	30	40	50	60	75	100	125	150
	Input	Applicable Motor Output (575V, HP)	15	20	25	30	40	50	60	75	100	125
		Rated Output Current (A)	20	24	30	36	45	54	67	86	104	125
		Overload tolerance	120% of rated current for 1 minute during every 5 minutes; 160% of rated current for 3 seconds during every 25 seconds									
		Max.output frequency (Hz)	599.00									
		Carrier Frequency (kHz)	2~9 (default setting 4)									
Input	Input Current (A) Light Duty	29	36	43	54	65	81	84	102	122	147	
	Input Current (A) Normal Duty	24	29	36	43	54	65	66	84	102	122	
	Rated Voltage/Frequency	3-Phase, 525~690V <sub>AC</sub> (-15%~+10%), 50/60Hz										
	Operating Voltage Range	446~759V <sub>AC</sub>										
	Frequency Tolerance	47~63Hz										
	Efficiency (%)	97										
	Power Factor	>0.98										
	AC Drive Weight (Kg)	10±1.5			39±1.5			61±1.5				
	Cooling Method	Fan cooling										
	Braking Chopper	Frame C (built-in)			Frame D and above (optional)							
	DC Choke	Frame C (optional)			Frame D and above (built-in)							

690V																
Frame Size		F			G		H									
Model VFD-□□□CP63A-□□		1600	2000	2500	3150	4000	4500	5600	6300							
Output *	LIGHT DUTY	Rated Output Capacity (kVA)	215	263	347	418	494.5	534.7	678.5	776						
		Applicable Motor Output (690V, kW)	160	200	250	315	400	450	560	630						
		Applicable Motor Output (690V, HP)	215	270	335	425	530	600	750	850						
		Applicable Motor Output (575V, HP)	150	200	250	350	400	450	500	750						
		Rated Output Current (A)	180	220	290	350	430	465	590	675						
	NORMAL DUTY	Overload tolerance	120% of rated current for 1 minute during every 5 minutes													
		Max.output frequency (Hz)	599.00													
		Rated Output Capacity (kVA)	179	215	239	347	402.5	442.7	534.7	776						
		Applicable Motor Output (690V, kW)	132	160	200	250	315	355	450	630						
		Applicable Motor Output (690V, HP)	175	215	270	335	425	475	600	850						
	Input	Applicable Motor Output (575V, HP)	150	150	200	250	350	400	450	750						
		Rated Output Current (A)	150	180	220	290	350	385	465	675						
		Overload tolerance	120% of rated current for 1 minute during every 5 minutes; 160% of rated current for 3 seconds during every 25 seconds													
		Max.output frequency (Hz)	599.00													
		Carrier Frequency (kHz)	2~9 (default setting 4)							2~9 (default setting 3)						
Input	Input Current (A) Light Duty	178	217	292	353	454	469	595	681							
	Input Current (A) Normal Duty	148	178	222	292	353	388	504	681							
	Rated Voltage/Frequency	3-Phase, 525~690V <sub>AC</sub> (-15%~+10%), 50/60Hz														
	Operating Voltage Range	446~759V <sub>AC</sub>														
	Frequency Tolerance	47~63Hz														
	Efficiency (%)	97			98											
	Power Factor	>0.98														
	AC Drive Weight (Kg)	88±1.5			135±4			243±5								
	Cooling Method	Fan cooling														
	Braking Chopper	Frame D and above (optional)														
	DC Choke	Frame D and above (built-in)														

Note : 1. When a load is a surge load, use a higher level model.  
 2. For Frame A, B and C, Model VFDXXXCPXXX-21, the enclosure type is IP20/ UL OPEN TYPE.  
 3. For Frame D and above, if the last two characters of the model are 00, then the enclosure type is IP00/ IP20/ UL OPEN TYPE; if the last two characters of the model are 21, the enclosure type is IP20/NEMA1/ UL TYPE1.

# General Specifications


Control Characteristics	Control Method	Pulse Width Modulated (PWM)								
	Control Mode	1: V/F (V/F control), 2: SVC (Sensorless Vector Control), 3: PM (Permanent Magnet Motor)								
	Starting Torque	Reach up to 150% or above at 0.5Hz								
	V/F Curve	4 point adjustable V/F curve and square curve								
	Speed Response Ability	5Hz								
	Torque Limit	Light Duty: Max. 130% torque current; Normal Duty: Max. 160% torque current								
	Torque Accuracy	$\pm 5\%$								
	Max. Output Frequency (Hz)	230V model: 599.00 (55kW and above: 400.00) 460V model: 599.00 (90kW and above: 400.00) 575V/690V model: 599.00								
	Frequency Output Accuracy	Digital command: $\pm 0.01\%$ , -10°C ~ +40°C, Analog command: $\pm 0.1\%$ , 25 $\pm 10$ °C								
	Output Frequency Resolution	Digital command: 0.01Hz; Analog command: Max. output frequency $\times 0.03/60$ Hz ( $\pm 11$ bit)								
	Overload Tolerance	Light duty: 120% of rated current for 1 minute during every 5 minutes Normal duty: 120% of rated current for 1 minute during every 5 minutes; 160% of rated current for 3 seconds during every 25 seconds								
	Frequency Setting Signal	0 ~ +10V, 4 ~ 20mA, 0 ~ 20mA								
	Accel./decel. Time	0.00 ~ 600.00/0.0 ~ 6000.0 seconds								
	Main Control Function	Fault restart	Torque limit	High-Slip braking	Dwell	3-wire sequence				
		Speed search	Parameter copy	JOG frequency	Slip compensation	Torque compensation				
		S-curve accel/decel	Energy saving control	Accel/Decel. Time switch	Frequency upper/lower limit settings	Momentary power loss ride thru				
		PID control (with sleep function)	Auto-Tuning (rotational, stationary)	DC injection braking at start/stop	BACnet Communication	17-step speed (max.)				
		Over-torque detection	Modbus communication (RS-485 RJ45, Max. 5.2Kbps)							
	Fan Control	230V model: Model with spec higher than VFD185CP23 (included) are PWM control; Model with spec lower than VFD150CP23 (not included) are on/off switch control. 460V model: Model with spec higher than VFD220CP43/4E (included) are PWM control; Model with spec lower than VFD185CP43/4E (not included) are on/off switch control. 575V/690V model: PWM control								
Protection Characteristics	Motor Protection	Electronic thermal relay protection								
	Over-Current Protection	230V/460V model: Light duty: Over-current protection for 200% rated current, Normal duty: Over-current protection for 240% rated current, Current clamp (Light duty: 130 ~ 135%) ; (Normal duty: 170 ~ 175%) 575V/690V model: Over-current protection for 225% rated current Current clamp (Light duty: around 128 ~ 141%) ; (Normal duty: around 170 ~ 175%)								
	Over-Voltage Protection	230V model: drive will stop when DCBUS voltage exceeds 410V 460V model: drive will stop when DCBUS voltage exceeds 820V 575V model: drive will stop when DCBUS voltage exceeds 1016V 690V model: drive will stop when DCBUS voltage exceeds 1189V								
	Over-Temperature Protection	built-in temperature sensor								
	Stall Prevention	Stall prevention during acceleration, deceleration and running independently								
	Restart After Instantaneous Power Failure	Parameter setting up to 20 seconds								
	Grounding Leakage Current Protection	Leakage current is higher than 50% of rated current of the AC motor drive								
	Short-circuit Current Rating (SCCR)	Per UL508C, the drive is suitable for use on a circuit capable of delivering not more than 100kA symmetrical amperes (rms) when protected by fuses given in the fuse table								
	International Certifications	CE	UL	GB/T12668-2	EAC					

Note: EAC Certification is for 230V and 460V models only

# Wiring


## Wiring Diagram for Frame A ~ C

\*Input: 3-phase power

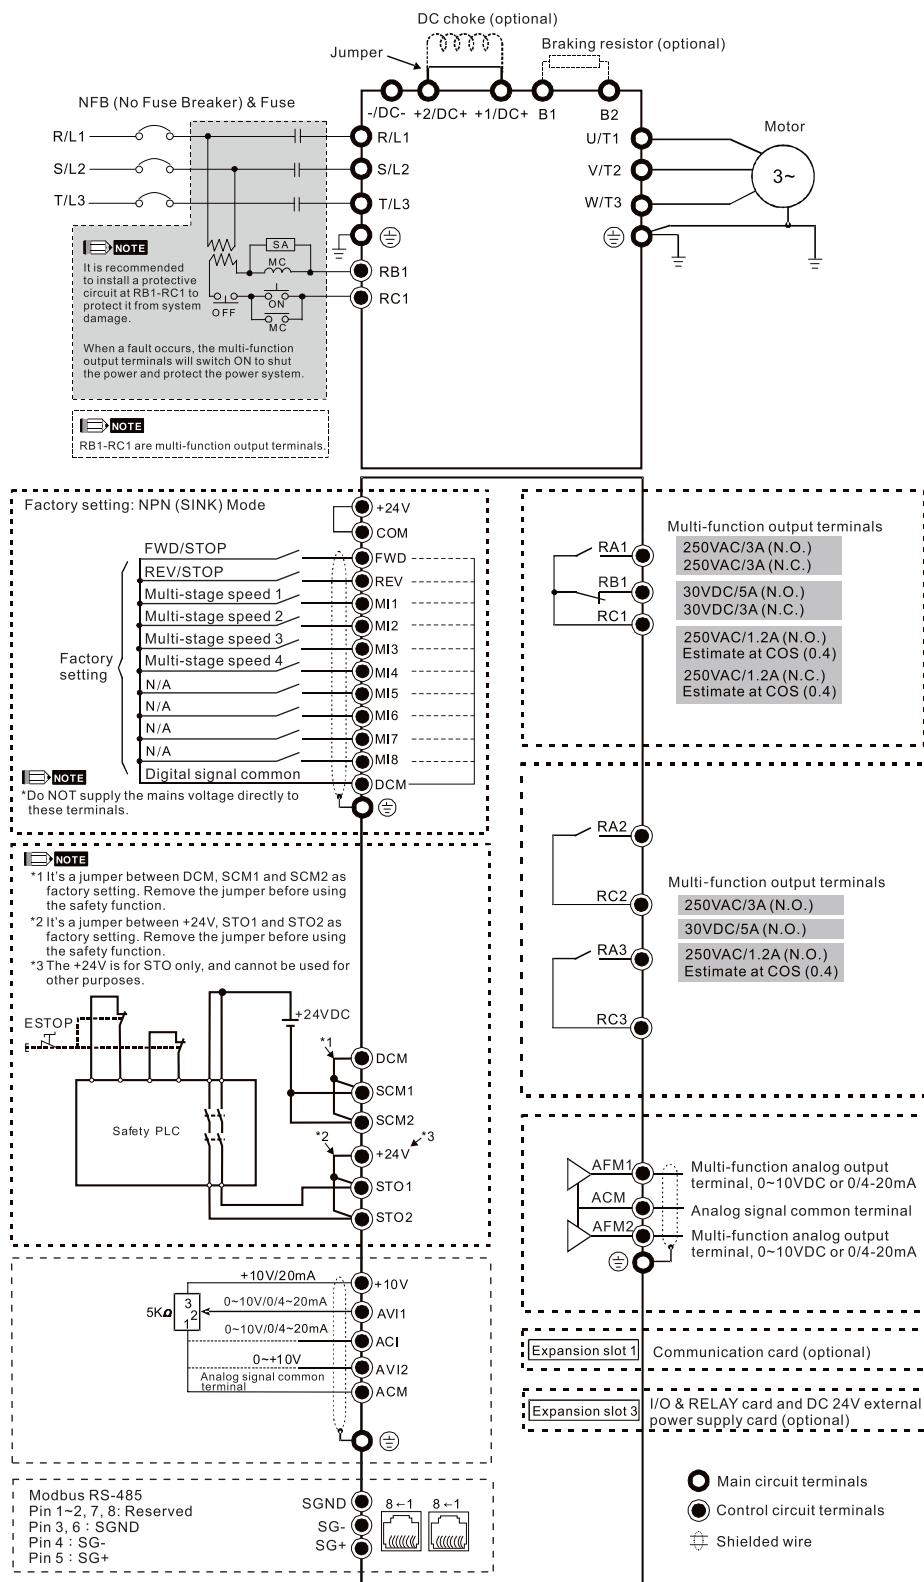


## Wiring Diagram for Frame D ~ F

\*Input: 3-phase power

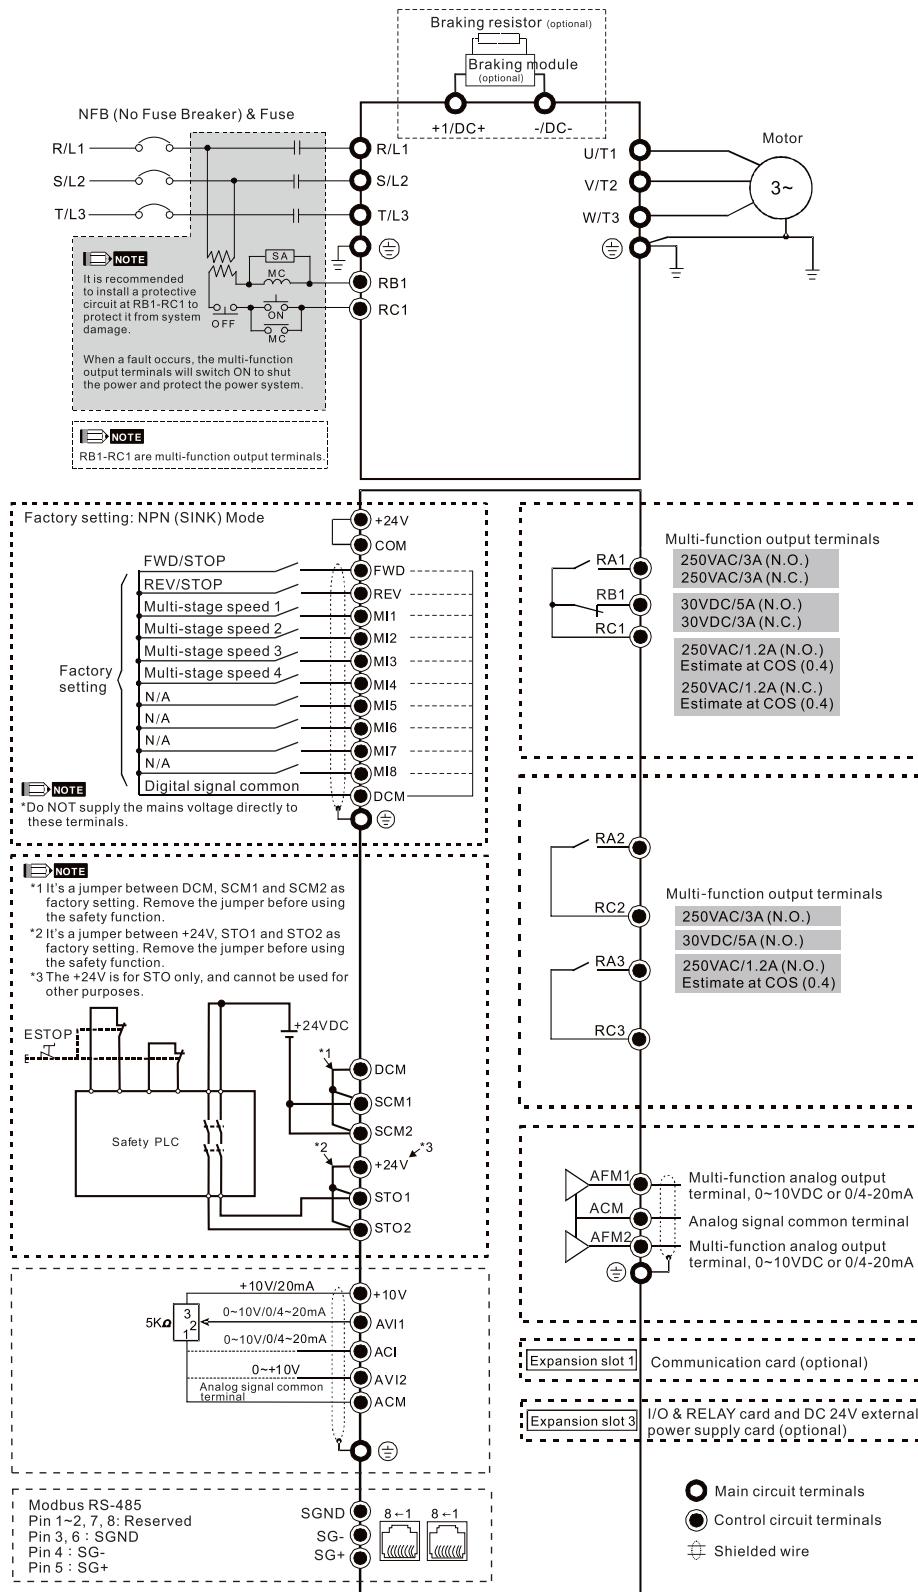

## Wiring Diagram for Frame G ~ H


\*Input: 3-phase power

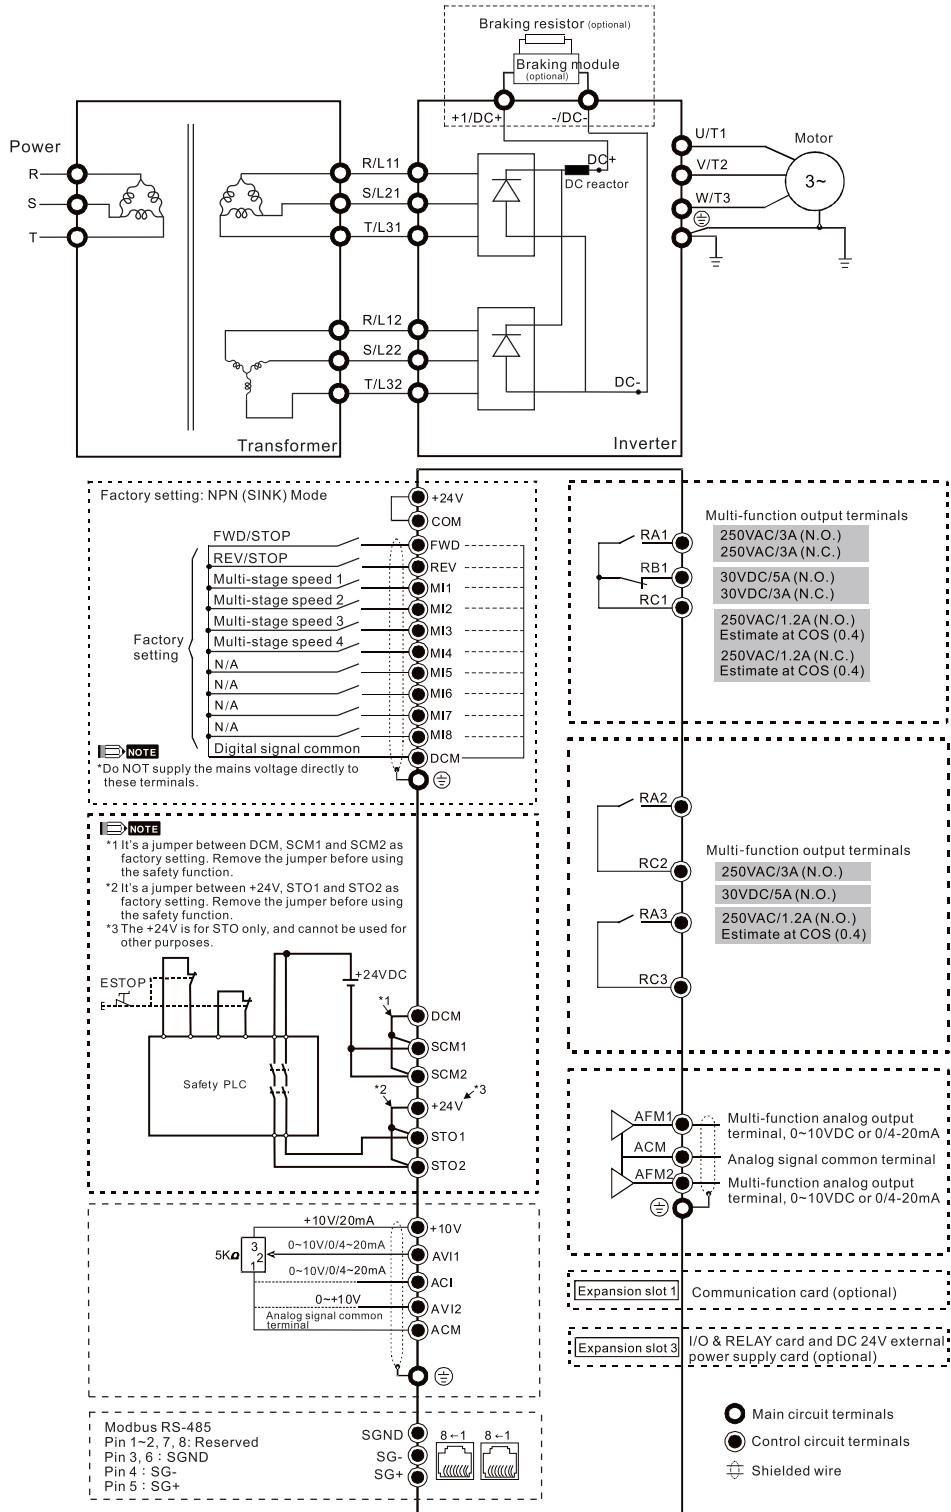

• When wiring for 12 Pulse Input, please strictly follow above wiring diagram.

# Dimensions


Digital Keypad    Unit: mm [inch]

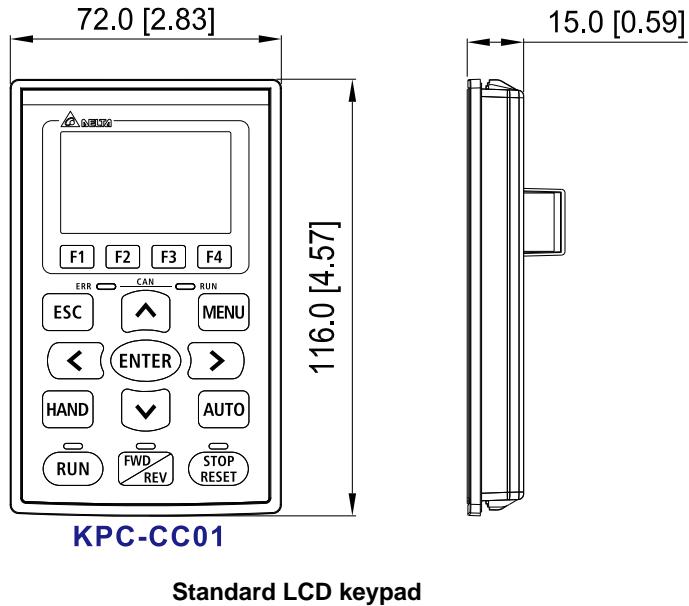

Standard LCD keypad

## Frame A


MODEL	
VFD007CP23A-21	VFD007CP4EA-21
VFD015CP23A-21	VFD015CP4EB-21
VFD022CP23A-21	VFD022CP4EB-21
VFD037CP23A-21	VFD037CP4EB-21
VFD055CP23A-21	VFD040CP4EA-21
VFD007CP43A-21	VFD055CP4EB-21
VFD015CP43B-21	VFD075CP4EB-21
VFD022CP43B-21	VFD015CP53A-21
VFD037CP43B-21	VFD022CP53A-21
VFD040CP43A-21	VFD037CP53A-21
VFD055CP43B-21	
VFD075CP43B-21	

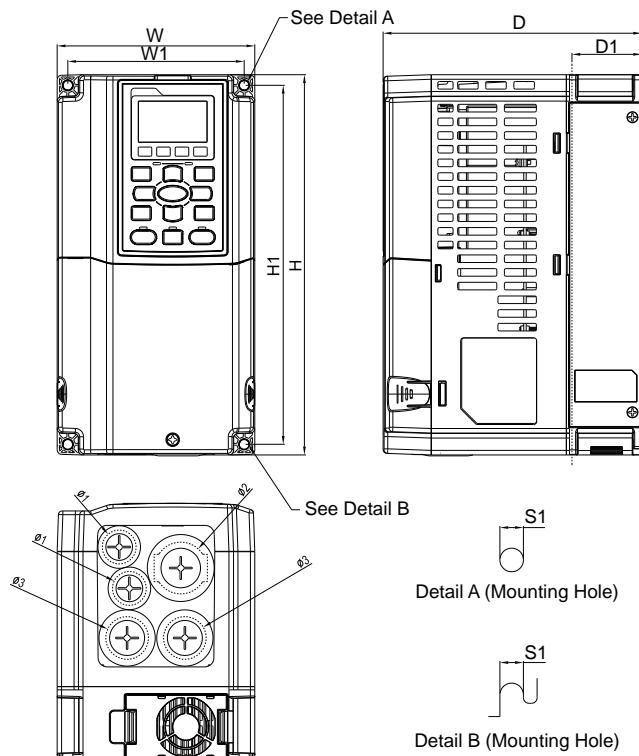

Frame		W	H	D	W1	H1	D1*	Ø	Ø1	Ø2	Ø3
A	mm	130.0	250.0	170.0	116.0	236.0	45.8	6.2	22.2	34.0	28.0
	inch	5.12	9.84	6.69	4.57	9.29	1.80	0.24	0.87	1.34	1.10

\*D1: Flange mount.

## Frame B

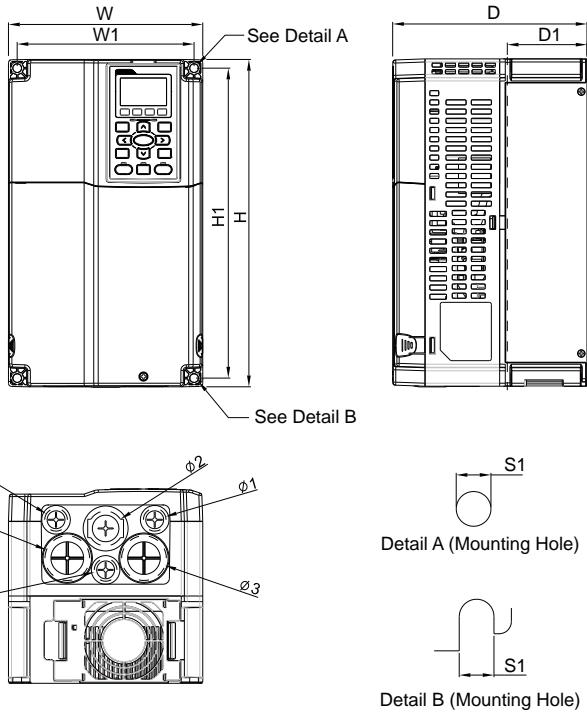


### MODEL

VFD075CP23A-21  
VFD110CP23A-21  
VFD150CP23A-21  
VFD110CP43B-21  
VFD150CP43B-21  
VFD185CP43B-21  
VFD110CP4EB-21  
VFD150CP4EB-21  
VFD185CP4EB-21  
VFD055CP53A-21  
VFD075CP53A-21  
VFD110CP53A-21  
VFD150CP53A-21

Frame	W	H	D	W1	H1	D1*	S1	Ø1	Ø2	Ø3	
B1	mm	190.0	320.0	190.0	173.0	303.0	77.9	8.5	22.2	34.0	43.8
	inch	7.48	12.60	7.48	6.81	11.93	3.07	0.33	0.87	1.34	1.72

\*D1: Flange mount.

## Frame C

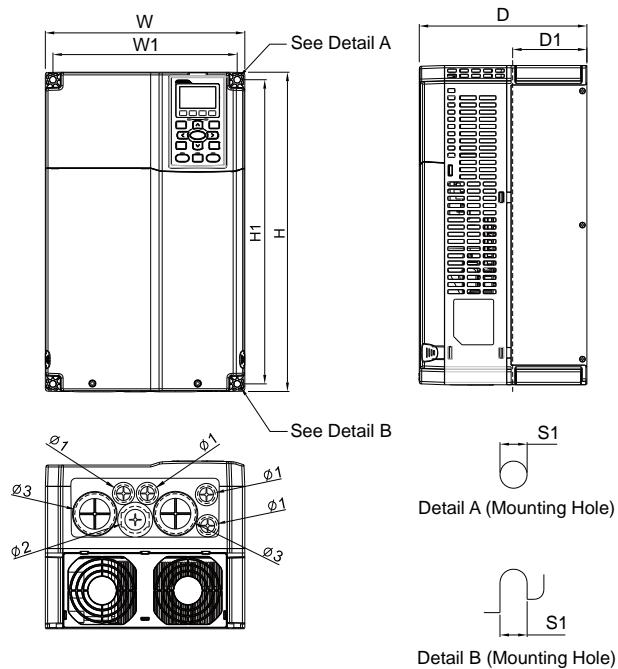

### MODEL

VFD185CP23A-21  
VFD220CP23A-21  
VFD300CP23A-21  
VFD220CP43A-21  
VFD300CP43B-21  
VFD370CP43B-21  
VFD220CP4EA-21  
VFD300CP4EB-21  
VFD370CP4EB-21  
VFD185CP63A-21  
VFD220CP63A-21  
VFD300CP63A-21  
VFD370CP63A-21




Frame	W	H	D	W1	H1	D1*	S1	Ø1	Ø2	Ø3	
C1	mm	250.0	400.0	210.0	231.0	381.0	92.9	8.5	22.2	34.0	50.0
	inch	9.84	15.75	8.27	9.09	15.00	3.66	0.33	0.87	1.34	1.97

\*D1: Flange mount.

## Frame D1

### MODEL FRAME\_D1

VFD370CP23A-00  
VFD450CP23A-00  
VFD750CP43B-00  
VFD900CP43A-00  
VFD450CP63A-00  
VFD550CP63A-00

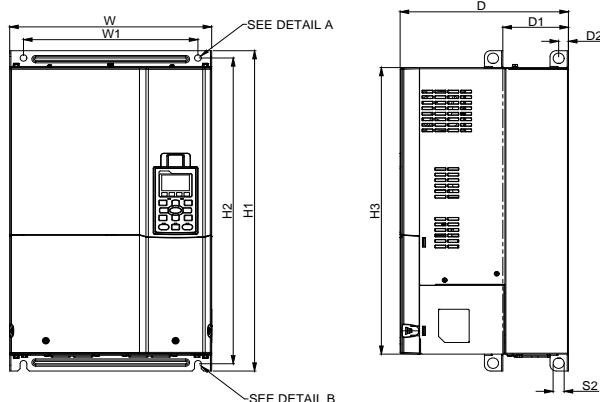




Frame	W	H	D	W1	H1	H2	H3	D1*	D2	S1	S2	Ø1	Ø2	Ø3
D1	mm	330.0	-	275.0	285.0	550.0	525.0	492.0	107.2	16.0	11.0	18.0	-	-
	inch	12.99	-	10.83	11.22	21.65	20.67	19.37	4.22	0.63	0.43	0.71	-	-

\*D1: Flange mount.

## Frame D2

### MODEL FRAME\_D2

VFD370CP23A-21  
VFD450CP23A-21  
VFD750CP43B-21  
VFD900CP43A-21  
VFD450CP63A-21  
VFD550CP63A-21

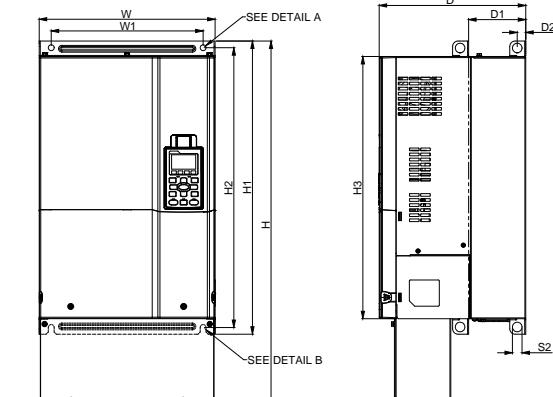


Frame	W	H	D	W1	H1	H2	H3	D1*	D2	S1	S2	Ø1	Ø2	Ø3
D2	mm	330.0	688.3	275.0	285.0	550.0	525.0	492.0	107.2	16.0	11.0	18.0	76.2	34.0
	inch	12.99	27.10	10.83	11.22	21.65	20.67	19.37	4.22	0.63	0.43	0.71	3.00	1.34

\*D1: Flange mount.

## Frame D0-1

### MODEL FRAME\_D0-1

VFD450CP43S-00  
VFD550CP43S-00

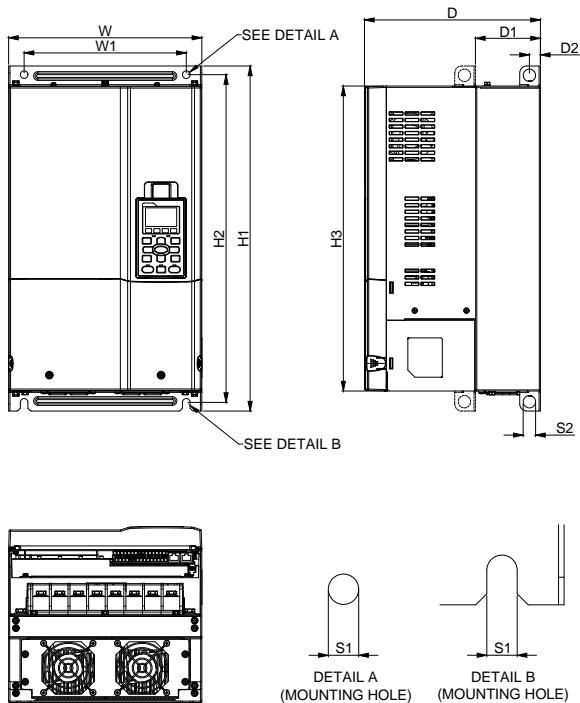


Frame	W	H	D	W1	H1	H2	H3	D1*	D2	S1	S2	
D0-1	mm	280.0	-	255.0	235.0	500.0	475.0	442.0	94.2	16.0	11.0	18.0
	inch	11.02	-	10.04	9.25	19.69	18.70	17.40	3.71	0.63	0.43	0.71

\*D1: Flange mount.

## Frame D0-2

### MODEL FRAME\_D0-2


VFD450CP43S-21  
VFD550CP43S-21

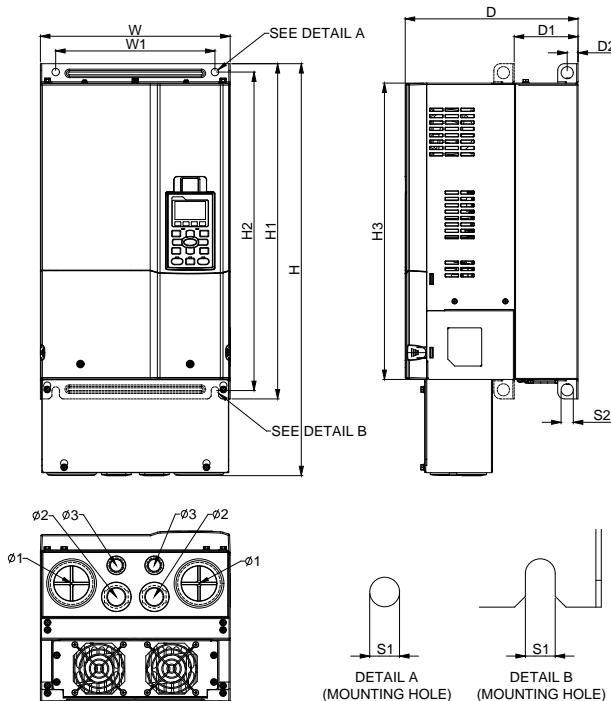

Frame	W	H	D	W1	H1	H2	H3	D1*	D2	S1	S2	Ø1	Ø2	Ø3	
D0-2	mm	280.0	614.4	255.0	235.0	500.0	475.0	442.0	94.2	16.0	11.0	18.0	62.7	34.0	22.0
	inch	11.02	24.19	10.04	9.25	19.69	18.70	17.40	3.71	0.63	0.43	0.71	2.47	1.34	0.87


\*D1: Flange mount.

## Frame E1

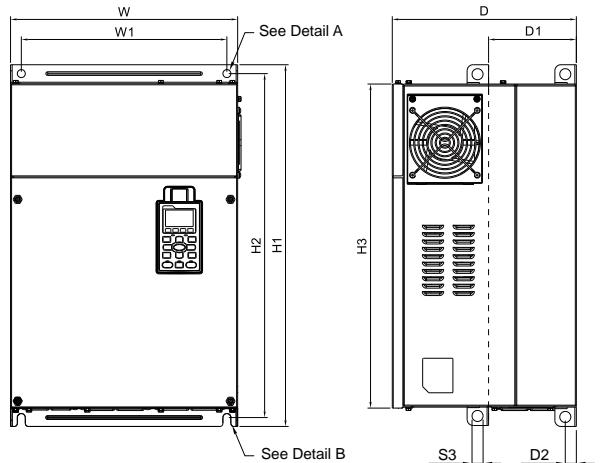

### MODEL


VFD550CP23A-00	VFD750CP63A-00
VFD750CP23A-00	VFD900CP63A-00
VFD900CP23A-00	VFD1100CP63A-00
VFD1100CP43A-00	VFD1320CP63A-00
VFD1320CP43B-00	

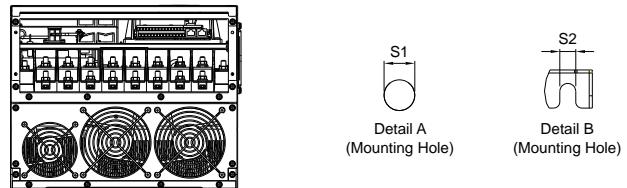

Frame	W	H	D	W1	H1	H2	H3	D1*	D2	S1	S2	S3	Ø1	Ø2	Ø3
E1	mm	370.0	-	300.0	335.0	589.0	560.0	528.0	143.0	18.0	13.0	13.0	18.0	-	-
	inch	14.57	-	11.81	13.19	23.19	22.05	20.80	5.63	0.71	0.51	0.51	0.71	-	-


\*D1: Flange mount.

## Frame E2

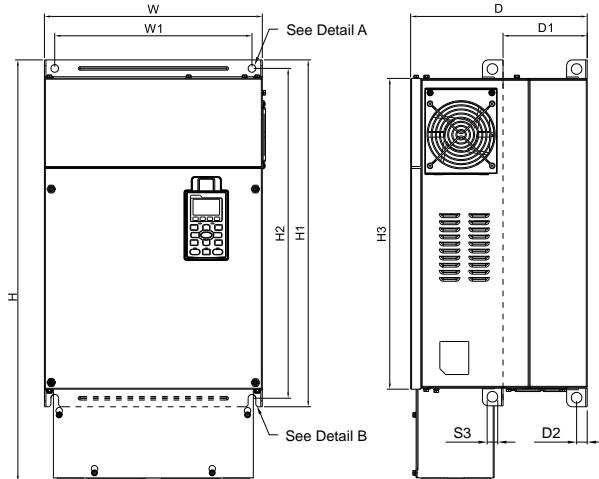

### MODEL


VFD550CP23A-21	VFD750CP63A-21
VFD750CP23A-21	VFD900CP63A-21
VFD900CP23A-21	VFD1100CP63A-21
VFD1100CP43A-21	VFD1320CP63A-21
VFD1320CP43B-21	

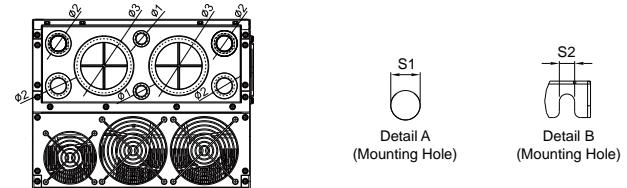

Frame	W	H	D	W1	H1	H2	H3	D1*	D2	S1	S2	S3	Ø1	Ø2	Ø3
E2	mm	370.0	715.8	300.0	335.0	589.0	560.0	528.0	143.0	18.0	13.0	13.0	18.0	22.0	34.0
	inch	14.57	28.18	11.81	13.19	23.19	22.05	20.80	5.63	0.71	0.51	0.51	0.71	0.87	1.34



\*D1: Flange mount.

## Frame F1

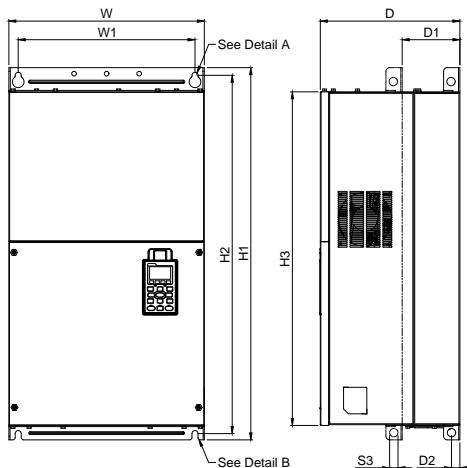

### MODEL


VFD1600CP43A-00  
VFD1850CP43B-00  
VFD1600CP63A-00  
VFD2000CP63A-00



Frame	W	H	D	W1	H1	H2	H3	D1*	D2	S1	S2	S3	Ø1	Ø2	Ø3
F1	mm	420.0	-	300.0	380.0	800.0	770.0	717.0	124.0	18.0	13.0	25.0	18.0	-	-
	inch	16.54	-	11.81	14.96	31.50	30.32	28.23	4.88	0.71	0.51	0.98	0.71	-	-



\*D1: Flange mount.

## Frame F2

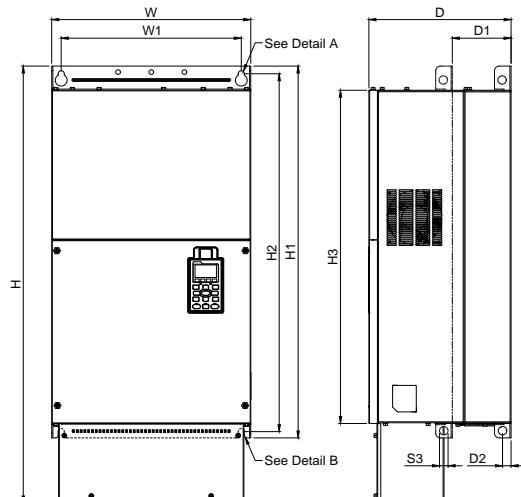

### MODEL


VFD1600CP43A-21  
VFD1850CP43B-21  
VFD1600CP63A-21  
VFD2000CP63A-21



Frame	W	H	D	W1	H1	H2	H3	D1*	D2	S1	S2	S3	Ø1	Ø2	Ø3
F2	mm	420.0	940.0	300.0	380.0	800.0	770.0	717.0	124.0	18.0	13.0	25.0	18.0	92.0	35.0
	inch	16.54	37.00	11.81	14.96	31.50	30.32	28.23	4.88	0.71	0.51	0.98	0.71	3.62	1.38



\*D1: Flange mount.

## Frame G1

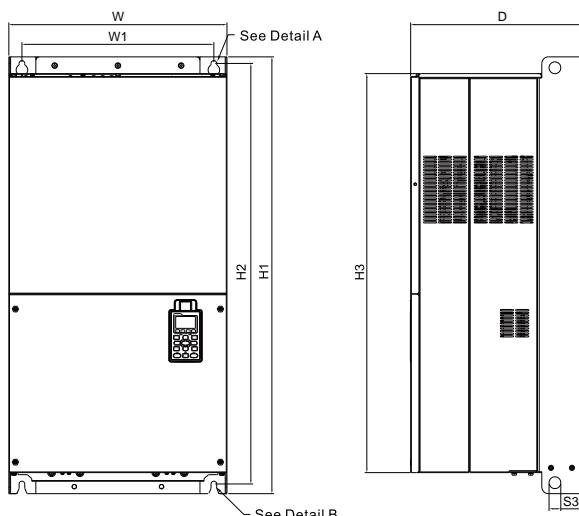


### MODEL

VFD2200CP43A-00  
VFD2800CP43A-00  
VFD2500CP63A-00  
VFD3150CP63A-00





Frame	W	H	D	W1	H1	H2	H3	S1	S2	S3	Ø1	Ø2	Ø3
G1	mm	500.0	-	397.0	440.0	1000.0	963.0	913.6	13.0	26.5	27.0	-	-
	inch	19.69	-	15.63	217.32	39.37	37.91	35.97	0.51	1.04	1.06	-	-

## Frame G2

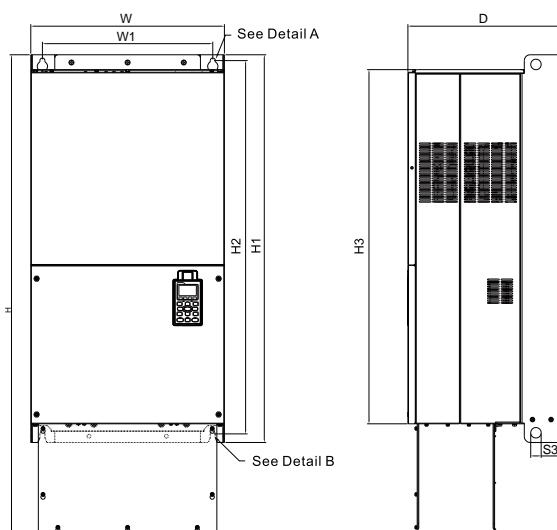


### MODEL

VFD2200CP43A-21  
VFD2800CP43A-21  
VFD2500CP63A-21  
VFD3150CP63A-21



Frame	W	H	D	W1	H1	H2	H3	S1	S2	S3	Ø1	Ø2	Ø3
G2	mm	500.0	1240.2	397.0	440.0	1000.0	963.0	913.6	13.0	26.5	27.0	22.0	34.0
	inch	19.69	48.83	15.63	217.32	39.37	37.91	35.97	0.51	1.04	1.06	0.87	1.34




## Frame H1

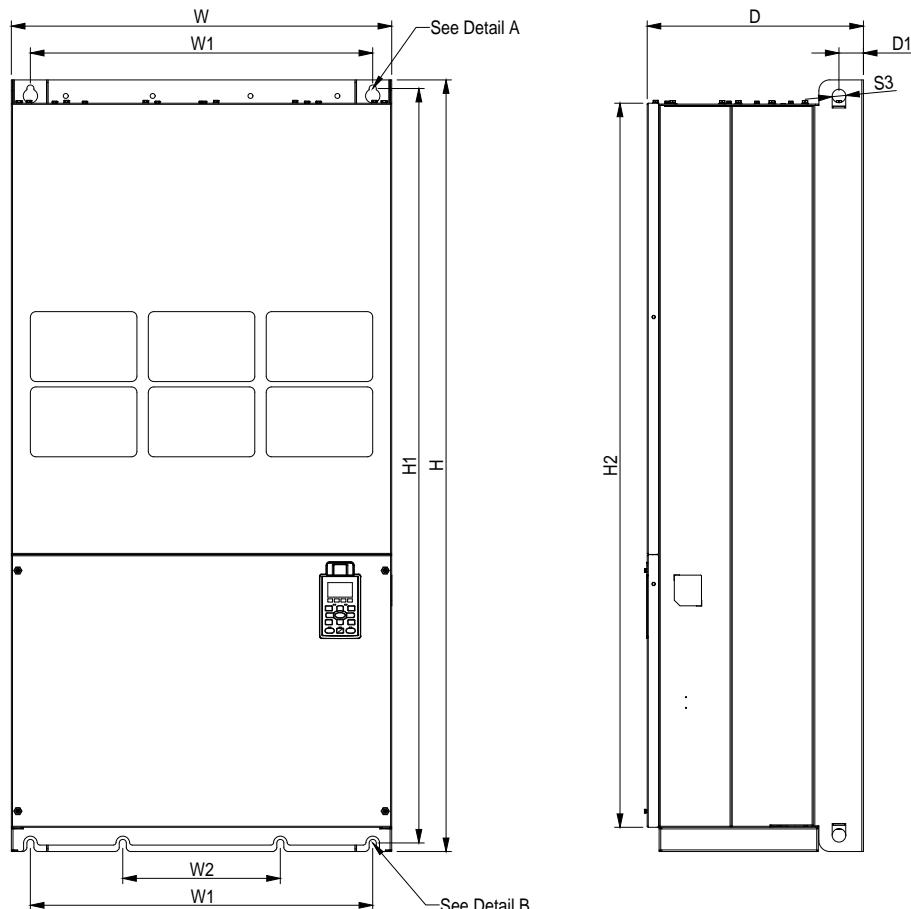


---

### MODEL

VFD3150CP43A-00  
 VFD3550CP43A-00  
 VFD4000CP43A-00  
 VFD5000CP43A-00  
 VFD5600CP43A-00  
 VFD6300CP43A-00


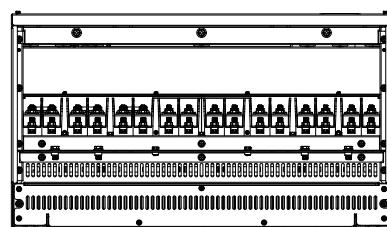


See Detail A(Mounting Hole)

See Detail B(Mounting Hole)

Frame		W	H	D	W1	W2	W3	W4	W5	W6	H1	H2	H3	H4
H1	mm	700.0	1435.0	398.0	630.0	290.0	-	-	-	-	1403.0	1346.6	-	-
	inch	27.56	56.5	15.67	24.80	11.42	-	-	-	-	55.24	53.02	-	-
Frame		H5	D1	D2	D3	D4	D5	D6	S1	S2	S3	Ø1	Ø2	Ø3
H1	mm	-	45.0	-	-	-	-	-	13.0	26.5	25.0	-	-	-
	inch	-	1.77	-	-	-	-	-	0.51	1.04	0.98	-	-	-

## Frame H3


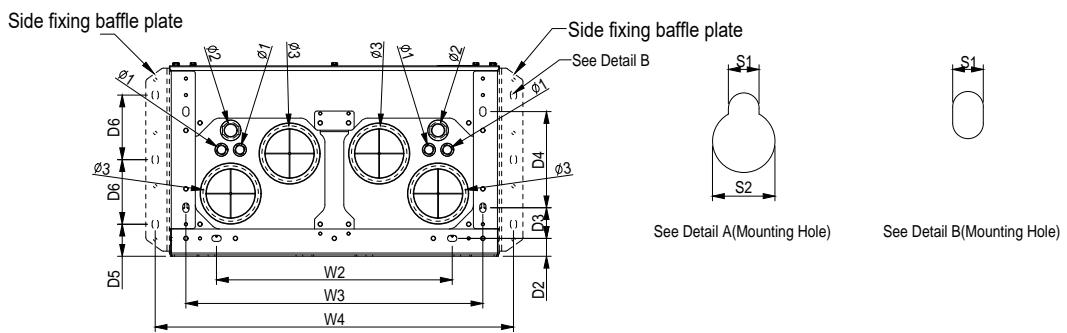
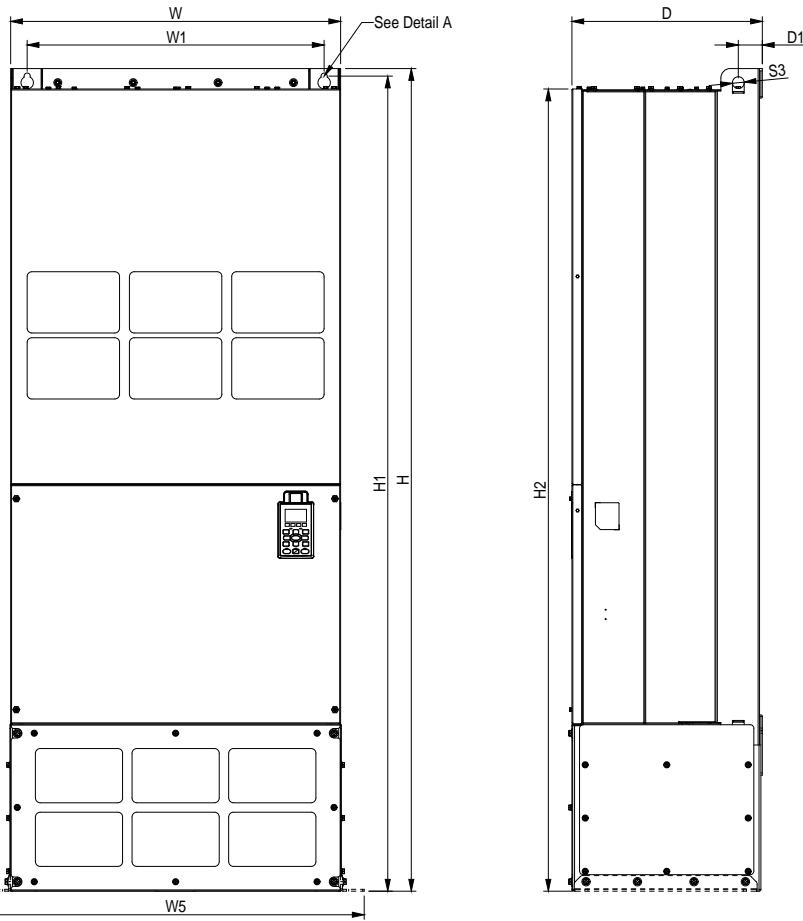


### MODEL

VFD3150CP43C-21  
VFD3550CP43C-21  
VFD4000CP43C-21  
VFD5000CP43C-21  
VFD5600CP43C-21  
VFD6300CP43C-21

Frame	W	H	D	W1	W2	W3	W4	W5	W6	H1	H2	H3	H4	
H3	mm	700.0	1745.0	404.0	630.0	500.0	630.0	760.0	800.0	-	1729.0	1701.6	-	-
	inch	27.56	68.70	15.91	24.80	19.69	24.80	29.92	31.50	-	68.07	66.99	-	-
Frame	H5	D1	D2	D3	D4	D5	D6	S1	S2	S3	Ø1	Ø2	Ø3	
H3	mm	-	51.0	38.0	65.0	204.0	68.0	137.0	13.0	26.5	25.0	22.0	34.0	117.5
	inch	-	2.0	1.50	2.56	8.03	2.68	5.4	0.51	1.04	0.98	0.87	1.34	4.63

## 690V Frame H1

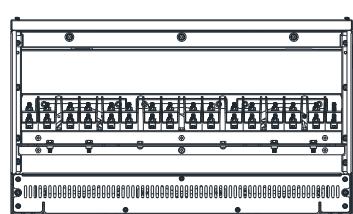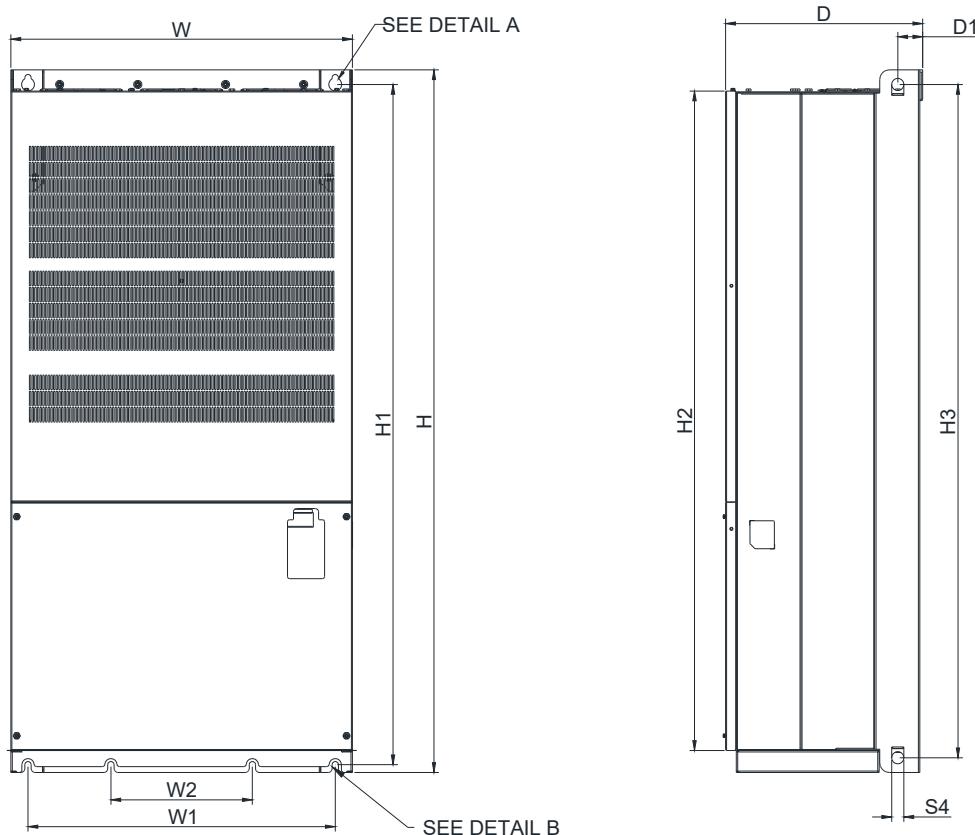

**MODEL**  
**690V FRAME\_H1**


VFD4000CP63A-00  
VFD4500CP63A-00  
VFD5600CP63A-00  
VFD6300CP63A-00

DETAIL A  
(MOUNTING HOLE)

DETAIL B  
(MOUNTING HOLE)

Frame		W	H	D	W1	W2	W3	W4	W5	W6	H1	H2	H3	H4
H1	mm	700.0	1435.0	398.0	630.0	290.0	-	-	-	-	1389.0	1346.6	1375.0	-
	inch	27.56	56.5	15.67	24.8	11.42	-	-	-	-	54.68	53.02	54.13	-
Frame		H5	D1	D2	D3	D4	D5	D6	S1	S2	S3	S4		
H1	mm	-	45.0	-	-	-	-	-	26.5	13.0	14.0	25.0		
	inch	-	1.77	-	-	-	-	-	1.04	0.51	0.55	0.98		

## 690V Frame H2

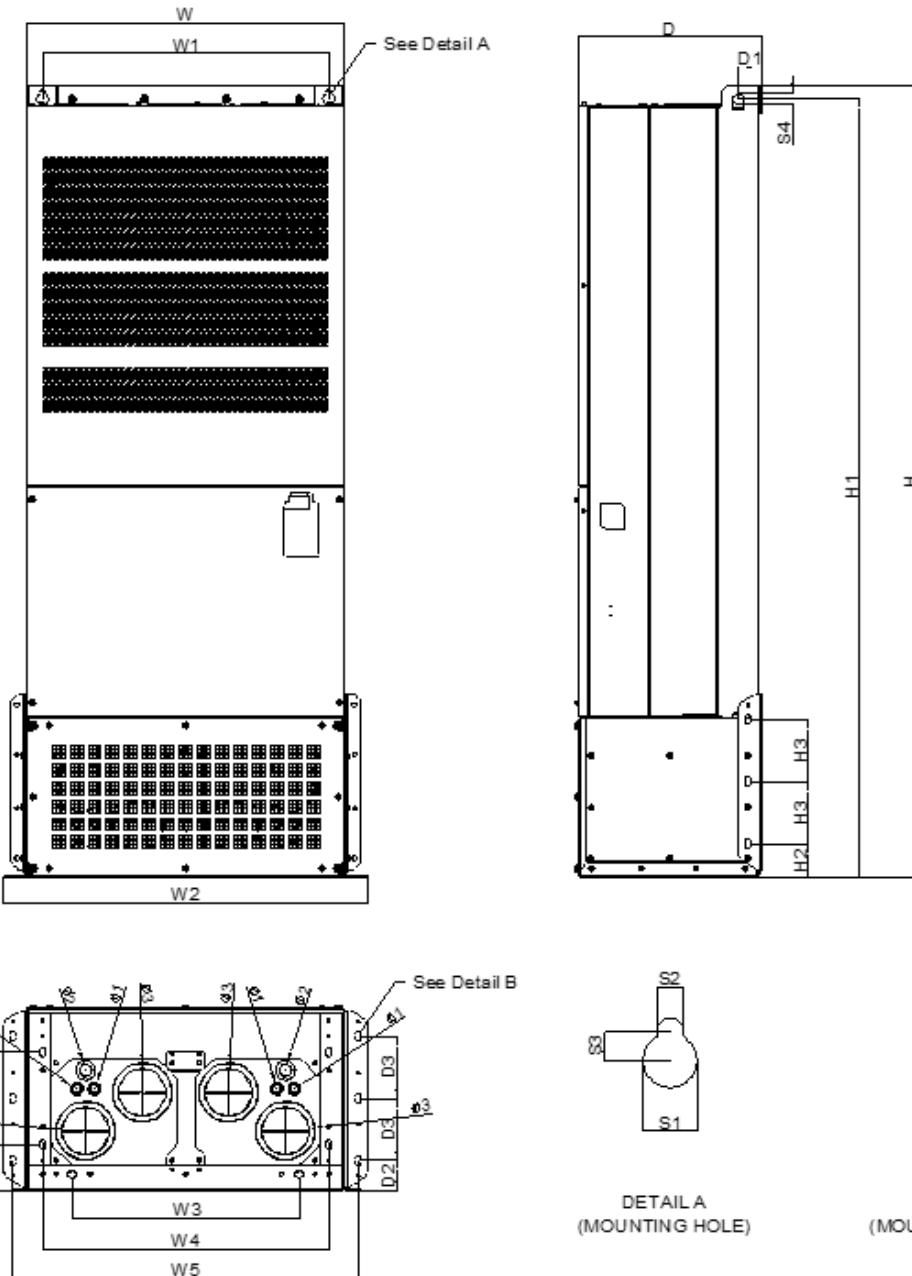

**MODEL**  
**690V FRAME\_H2**

VFD4000CP63A-21  
VFD4500CP63A-21  
VFD5600CP63A-21  
VFD6300CP63A-21

Frame	W	H	D	W1	W2	W3	W4	W5	W6	H1	H2	H3	H4	H5
H2	mm	700.0	1745.0	404.0	630.0	800.0	500.0	630.0	760.0	-	1715.0	74.5	137.0	-
	inch	27.56	68.70	15.91	24.8	31.5	19.69	24.8	29.92	-	67.52	2.93	5.39	-
Frame	D1	D2	D3	D4	D5	D6	S1	S2	S3	S4	S5	Ø1	Ø2	Ø3
H2	mm	51.0	68.0	137.0	103.0	204.0	-	26.5	13.0	14.0	25.0	13.0	22.0	34.0
	inch	2.01	2.68	5.39	4.06	8.03	-	1.04	0.51	0.55	0.98	0.51	0.87	1.34
														117.5

# Accessories

## Relay Extension Card

### ▪ EMC-R6AA

Terminals	Descriptions
	<p>Refer to Pr. 02-36~Pr. 02-41 for multi-function output selection            Resistive load:            3A (N.O.)/250V<sub>AC</sub>            5A (N.O.)/30V<sub>DC</sub>            Inductive load (COS 0.4)            1.2A (N.O.)/250V<sub>AC</sub>            2.0A (N.O.)/30V<sub>DC</sub></p> <p>It is used to output each monitor signal, such as for drive in operation, frequency attained or overload indication.</p>

## Analog I/O Extension Card

### ▪ EMC-A22A

Terminals	Description
AVI10 AVI11	<p>Refer to Pr. 14-00~Pr. 14-01 for function selection (input), and Pr. 14-18~Pr. 14-19 for mode selection            Two sets of AVI port for AVI or ACI switch: SSW3 (AVI10) and SSW4 (AVI11)            AVI: Input 0~10V            ACI: Input 0~20 mA/4~20 mA</p>
AFM10 AFM11	<p>Refer to Pr. 14-12~Pr. 14-13 for function selection (output), and Pr. 14-36~Pr. 14-37 for mode selection            Two sets of AFM port for AVO or ACO switch: SSW1 (AFM10) and SSW2 (AFM11)            AVO: Output 0~10V            ACO: Output 0~20.0 mA/4.0~20.0 mA</p>
ACM	Analog signal common terminal

## I/O Extension Card

### ▪ EMC-D611A

Terminals	Descriptions
AC	AC power common for multi-function input terminal (Neutral)
MI10~MI15	<p>Refer to Pr. 02-26~Pr. 02-31 for multi-function input selection            Input voltage: 100~130V<sub>AC</sub>; Input frequency: 57~63Hz            Input impedance: 27KΩ            Terminal response time: ON: 10ms; OFF: 20ms</p>

## I/O Extension Card

### ▪ EMC-D42A

Terminals	Descriptions
COM	Common for multi-function input terminals Select SINK (NPN)/SOURCE (PNP) in J1 jumper/external power supply
MI10~MI13	<p>Refer to Pr. 02-26~Pr. 02-29 to program the multi-function inputs MI10~MI13            Internal power is applied from terminal E24: +24V<sub>DC</sub> ± 5% 200 mA, 5W            External power +24V<sub>DC</sub>: max. voltage 30V<sub>DC</sub>, min. voltage 19V<sub>DC</sub>, 30W            ON: the activation current is 6.5mA; OFF: leakage current tolerance is 10μA</p>
MO10~MO11	<p>Multi-function output terminals (photocoupler)            Duty-cycle: 50%; Max. output frequency: 100 Hz            Max. current: 50 mA; Max. voltage: 48V<sub>DC</sub></p>
MXM	Common for multi-function output terminals MO10, MO11 (photocoupler) Max. 48V <sub>DC</sub> 50 mA

## 24V Power Shift Card

### ▪ EMC-BPS01

Terminals	Descriptions
24V GND	Allows operation of network system, PLC function and partial functions when the AC motor drive is power off Input power: 24 V <sub>DC</sub> ± 5% Maximum input current: 0.5A  Note: Do not connect the control terminal +24 V (Digital control signal common: SOURCE) directly to the EMC-BPS01 input terminal 24V. Do not connect control terminal GND directly to the EMC-BPS01 input terminal GND.

## CANopen Card

### ▪ EMC-COP01

	RJ-45 Pin	Pin name	Definition
	1	CAN_H	CAN_H bus line (dominant high)
	2	CAN_L	CAN_L bus line (dominant low)
	3	CAN_GND	Ground/0V/V-
	6	CAN_GND	Ground/0V/V-

## EtherNet/IP, Modbus TCP Card

### ▪ CMC-EIP01



#### Features

- ▶ Support EtherNet/IP and Modbus TCP protocol
- ▶ User-defined parameter mapping
- ▶ IP Filter, basic firewall function

## Network Interface

Interface	RJ-45 with Auto MDI/MDIX	Transmission Cable	Category 5e shielding 100M
Number of Ports	1 Port	Transmission Speed	10/100 Mbps Auto-Detect
Transmission Method	IEEE 802.3, IEEE 802.3u	Network Protocol	ICMP, IP, TCP, UDP, DHCP, BOOTP, SMTP, EtherNet/IP, Modbus TCP

## BACnet Card

### ▪ eZVFD-CC NEW



#### Features

- ▶ Supports native BACnet protocol Rev 12
- ▶ Supports BACnet/IP, BACnet over Ethernet communication protocols
- ▶ Dual port Ethernet supports daisy-chaining multiple VFD devices
- ▶ Maps VFD I/O terminals as BACnet I/O
- ▶ Fully programmable in GCL+
- ▶ Setup and configure using Delta Controls facility management software enteliWEB
- ▶ Real-time clock with supercap power backup

## eZVFD Connector

eZVFD Communication			
Interface	Dual Port RJ45	Transmission Speed	10/100 Base-T
Transmission Method	Ethernet	Network Protocol	BACnet/IP, BACnet Ethernet
Transmission Cable	Shielded CAT 5e/6	BACnet Protocol	Rev 12
		Device Addressing	Software Addressed

# Accessories

## PROFINET Card

### ▪ CMC-PN01 NEW



#### Features

- ▶ Supports PROFINET IO device
- ▶ Supports synchronous data transmission and synchronous parameter access
- ▶ Provides GSDML file for PROFINET communication

#### Network Interface

<b>Interface</b>	RJ-45	<b>Transmission Cable</b>	Category 5e shielding 100M
<b>Number of Ports</b>	2 Ports	<b>Transmission Speed</b>	10/100 Mbps auto-negotiate
<b>Transmission Method</b>	IEEE 802.3	<b>Network Protocol</b>	PROFINET

## PROFIBUS DP Card

### ▪ CMC-PD01



#### Features

- ▶ Supports PZD control data exchange
- ▶ Supports PKW polling AC motor drive parameters
- ▶ Supports user diagnosis function
- ▶ Supports remote I/O function
- ▶ Baud (auto-detection): max. 12Mbps

## PROFIBUS DP Connector

#### Communication

<b>Interface</b>	DB9 connector	<b>Message Type</b>	Cyclic data exchange
<b>Transmission Method</b>	High-speed RS-485	<b>Module Name</b>	CMC-PD01
<b>Transmission Cable</b>	Shielded twisted pair cable	<b>GSD Document</b>	DELA08DB.GSD
<b>Electrical Isolation</b>	500 V <sub>DC</sub>	<b>Company ID</b>	08DB (HEX)
		<b>Serial Transmission Speed Supported (auto-detection)</b>	9.6 Kbps; 19.2 Kbps; 38.75 Kbps; 76.5 Kbps; 153 Kbps; 306 Kbps; 612 Kbps; 1.2 Mbps; 2.4 Mbps; 4.8 Mbps; 9.6 Mbps (bits per second)

## DeviceNet Card

### ▪ CMC-DN01



#### Features

- ▶ Based on the high-speed communication interface of Delta HSSP protocol, able to conduct immediate control of an AC motor drive
- ▶ Supports Group 2 only connection and polling I/O data exchange
- ▶ Supports max. 32 words input / 32 words output and remote I/O function for I/O mapping
- ▶ Node address and serial transmission speed can be set up on AC motor drive
- ▶ Power supplied from AC motor drive


## DeviceNet Connector

## DeviceNet Connector

<b>Interface</b>	5-Pin 5.08mm Pluggable Connector	<b>Interface</b>	50-Pin communication terminal
<b>Transmission Method</b>	CAN	<b>Transmission Method</b>	SPI communication
<b>Transmission Cable</b>	Shielded twisted pair cable (with 2 power cables)	<b>Terminal Function</b>	1. Communicating with AC motor drive 2. Transmitting power supply from AC motor drive
<b>Transmission Speed</b>	125 Kbps, 250 Kbps, 500 Kbps and extendable serial transmission speed mode	<b>Communication Protocol</b>	Delta HSSP protocol
<b>Network Protocol</b>	DeviceNet protocol		

## Delta Standard Fieldbus Cables

Delta Cables	Part Number	Description	Length
CANopen Cable	UC-CMC003-01A	CANopen cable, RJ45 connector	0.3m
	UC-CMC005-01A	CANopen cable, RJ45 connector	0.5m
	UC-CMC010-01A	CANopen cable, RJ45 connector	1m
	UC-CMC015-01A	CANopen cable, RJ45 connector	1.5m
	UC-CMC020-01A	CANopen cable, RJ45 connector	2m
	UC-CMC030-01A	CANopen cable, RJ45 connector	3m
	UC-CMC050-01A	CANopen cable, RJ45 connector	5m
	UC-CMC100-01A	CANopen cable, RJ45 connector	10m
	UC-CMC200-01A	CANopen cable, RJ45 connector	20m
DeviceNet Cable	UC-DN01Z-01A	DeviceNet cable	305m
	UC-DN01Z-02A	DeviceNet cable	305m
EtherNet Cable	UC-EMC003-02A	EtherNet cable, Shielding	0.3m
	UC-EMC005-02A	EtherNet cable, Shielding	0.5m
	UC-EMC010-02A	EtherNet cable, Shielding	1m
	UC-EMC020-02A	EtherNet cable, Shielding	2m
	UC-EMC050-02A	EtherNet cable, Shielding	5m
	UC-EMC100-02A	EtherNet cable, Shielding	10m
	UC-EMC200-02A	EtherNet cable, Shielding	20m
PROFIBUS Cable	UC-PF01Z-01A	PROFIBUS DP cable	305m

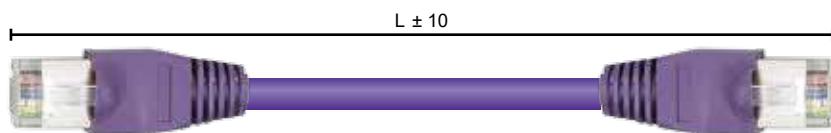


## CANopen / DeviceNet TAP Breakout Boxes

Part Number	Description
TAP-CN01	1 in 2 out, built-in 121Ω terminal resistor
TAP-CN02	1 in 4 out, built-in 121Ω terminal resistor
TAP-CN03	1 in 4 out, RJ45 connector, built-in 121Ω terminal resistor


Unit: mm [inch]



TAP-CN01

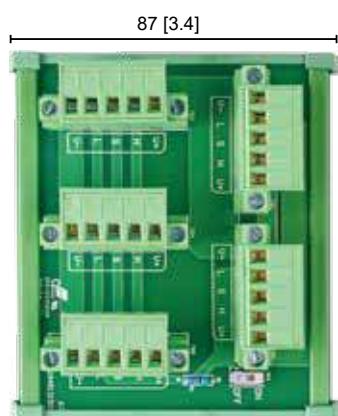

TAP-CN02

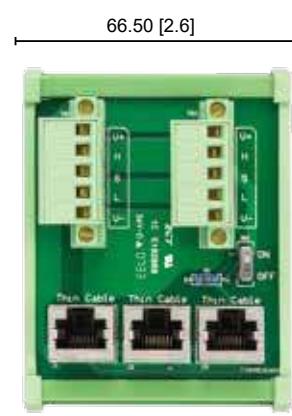


TAP-CN03

## Ordering Information

Frame Size		Power Range	Models			
<b>Frame A</b>		<b>230V:</b> 0.75 ~ 5.5kW	VFD007CP23A-21 VFD015CP23A-21 <b>460V:</b> 0.75 ~ 7.5kW	VFD007CP43A-21 VFD015CP43B-21 VFD022CP43B-21 VFD037CP43B-21 VFD055CP23A-21	VFD007CP4EA-21 VFD015CP4EB-21 VFD022CP4EB-21 VFD037CP4EB-21 VFD040CP43A-21 VFD040CP4EA-21 VFD055CP43B-21 VFD075CP43B-21	VFD015CP53A-21 VFD022CP53A-21 VFD037CP53A-21
		<b>575V:</b> 1.5 ~ 3.7kW				
<b>Frame B</b>		<b>230V:</b> 7.5 ~ 15kW	VFD075CP23A-21 VFD110CP23A-21 VFD150CP23A-21	VFD110CP43B-21 VFD150CP43B-21 VFD185CP43B-21	VFD110CP4EB-21 VFD150CP4EB-21 VFD185CP4EB-21	VFD055CP53A-21 VFD075CP53A-21 VFD110CP53A-21 VFD150CP53A-21
		<b>460V:</b> 11 ~ 18.5kW				
		<b>575V:</b> 5.5 ~ 15kW				
<b>Frame C</b>		<b>230V:</b> 18.5 ~ 30kW	VFD185CP23A-21 VFD220CP23A-21 VFD300CP23A-21	VFD220CP43A-21 VFD300CP43B-21 VFD370CP43B-21	VFD220CP4EA-21 VFD300CP4EB-21 VFD370CP4EB-21	VFD185CP63A-21 VFD220CP63A-21 VFD300CP63A-21 VFD370CP63A-21
		<b>460V:</b> 22 ~ 37kW				
		<b>690V:</b> 18.5 ~ 37kW				
<b>Frame D</b>		<b>230V:</b> 37 ~ 45kW	<b>Frame D1:</b> VFD370CP23A-00 VFD450CP23A-00 VFD750CP43B-00 VFD900CP43A-00	<b>Frame D2:</b> VFD370CP23A-21 VFD450CP23A-21 VFD750CP43B-21 VFD900CP43A-21		<b>Frame D1:</b> VFD450CP63A-00 VFD550CP63A-00
		<b>460V:</b> 45 ~ 90kW	<b>Frame D0-1:</b> VFD450CP43S-00 VFD550CP43S-00	<b>Frame D0-2:</b> VFD450CP43S-21 VFD550CP43S-21		<b>Frame D2:</b> VFD450CP63A-21 VFD550CP63A-21
		<b>690V:</b> 55 ~ 75kW				
<b>Frame E</b>		<b>230V:</b> 55 ~ 90kW	<b>Frame E1:</b> VFD550CP23A-00 VFD750CP23A-00 VFD900CP23A-00	<b>Frame E2:</b> VFD550CP23A-21 VFD750CP23A-21 VFD900CP23A-21		<b>Frame E1:</b> VFD750CP63A-00 VFD900CP63A-00 VFD1100CP63A-00 VFD1320CP63A-00
		<b>460V:</b> 110 ~ 132kW	VFD1100CP43A-00 VFD1320CP43B-00	VFD1100CP43A-21 VFD1320CP43B-21		<b>Frame E2:</b> VFD750CP63A-21 VFD900CP63A-21 VFD1100CP63A-21 VFD1320CP63A-21
		<b>690V:</b> 75 ~ 132kW				
<b>Frame F</b>		<b>460V:</b> 160 ~ 185kW	<b>Frame F1:</b> VFD1600CP43A-00 VFD1850CP43B-00	<b>Frame F2:</b> VFD1600CP43A-21 VFD1850CP43B-21		<b>Frame F1:</b> VFD1600CP63A-00 VFD2000CP63A-00
		<b>690V:</b> 160 ~ 200kW				<b>Frame F2:</b> VFD1600CP63A-21 VFD2000CP63A-21
<b>Frame G</b>		<b>460V:</b> 220 ~ 280kW	<b>Frame G1:</b> VFD2200CP43A-00 VFD2800CP43A-00	<b>Frame G2:</b> VFD2200CP43A-21 VFD2800CP43A-21		<b>Frame G1:</b> VFD2500CP63A-00 VFD3150CP63A-00
		<b>690V:</b> 250 ~ 315kW				<b>Frame G2:</b> VFD2500CP63A-21 VFD3150CP63A-21

Frame Size		Power Range	Models	
Frame H		460V: 315 ~ 630kW	Frame H1: VFD3150CP43A-00 VFD3550CP43A-00 VFD4000CP43A-00 VFD5000CP43A-00 VFD5600CP43A-00 VFD6300CP43A-00	Frame H3: VFD3150CP43C-21 VFD3550CP43C-21 VFD4000CP43C-21 VFD5000CP43C-21 VFD5600CP43C-21 VFD6300CP43C-21
Frame H (690V Model)		690V: 400 ~ 630kW		Frame H1: VFD4000CP63A-00 VFD4500CP63A-00 VFD5600CP63A-00 VFD6300CP63A-00  Frame H2: VFD4000CP63A-21 VFD4500CP63A-21 VFD5600CP63A-21 VFD6300CP63A-21

## Model Name

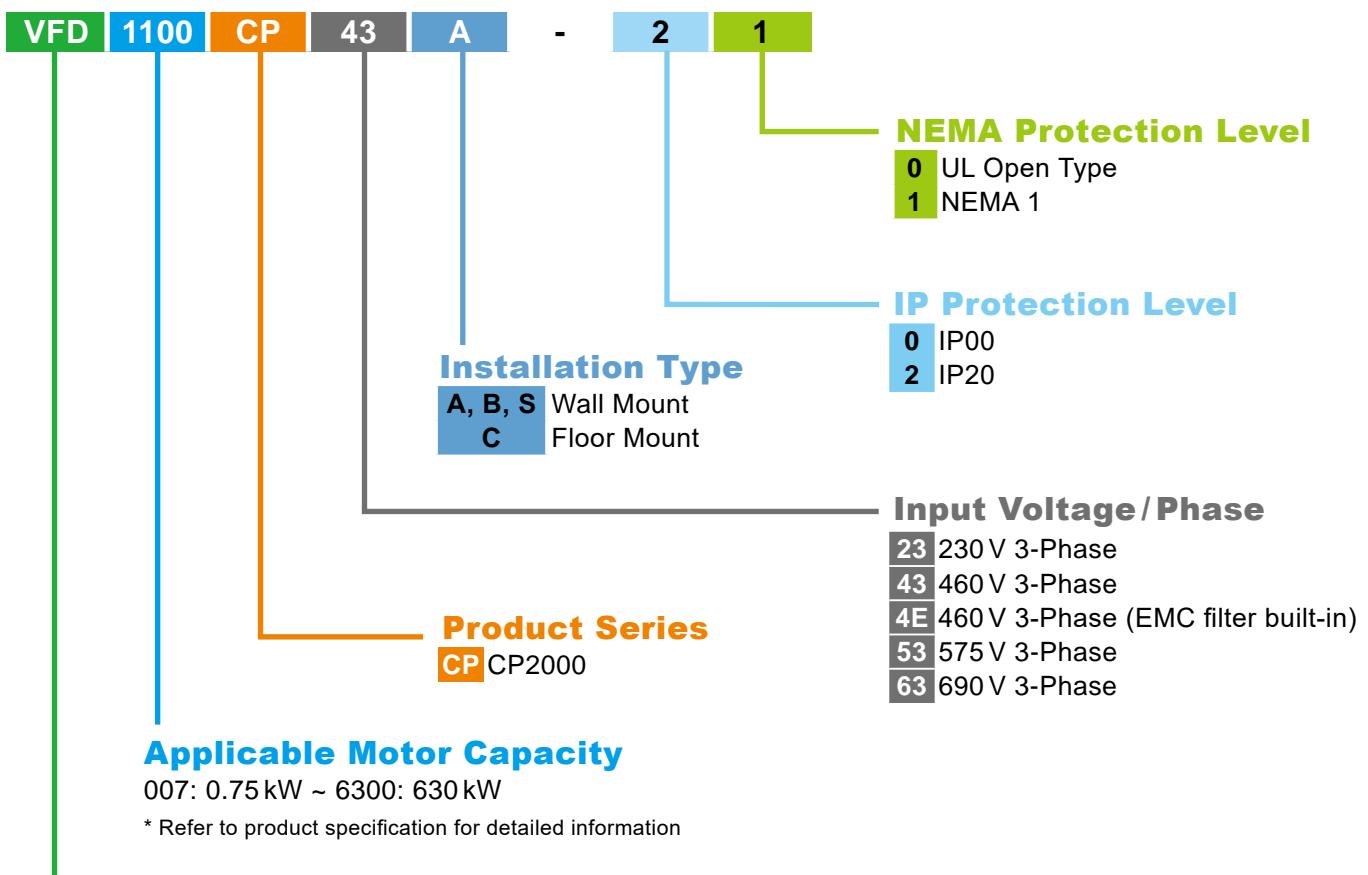

### Product

Variable Frequency Drive



## Attention

### Standard Motors

Used with 400V Standard Motors  
It is recommended to add an AC output reactor when using with a 400V standard motor to prevent damage to motor insulation.

### Torque Characteristics and Temperature Rise

When a standard motor is drive controlled, the motor temperature will be higher than with DOL operation.

Please reduce the motor output torque when operating at low speeds to compensate for less cooling efficiency.

For continuous constant torque at low speeds, external forced motor cooling is recommended.

### Vibration

When the motor drives the machine, resonances may occur, including machine resonances. Abnormal vibration may occur when operating a 2-pole motor at 60Hz or higher.

### Noise

When a standard motor is drive controlled, the motor noise will be higher than with DOL operation.

To lower the noise, please increase the carrier frequency of the drive. The motor fan can be very noisy when the motor speed exceeds 60Hz.

### Special Motors

#### High-speed Motor

To ensure safety, please try the frequency setting with another motor before operating the high-speed motor at 120Hz or higher.

#### Explosion-proof Motor

Please use a motor and drive that comply with explosion-proof requirements.

#### Submersible Motor & Pump

The rated current is higher than that of a standard motor.

Please check before operation and select the capacity of the AC motor drive carefully. The motor temperature characteristics differ from a standard motor, please set the motor thermal time constant to a lower value.

#### Brake Motor

When the motor is equipped with a mechanical brake, the brake should be powered by the mains supply.

Damage may occur when the brake is powered by the drive output. Please DO NOT drive the motor with the brake engaged.

#### Gear Motor

In gearboxes or reduction gears, lubrication may be reduced if the motor is continuously operated at low speeds.

Please DO NOT operate in this way.

#### Synchronous Motor

These motors need suitable software for control. Please contact Delta for more information.

#### Single-phase Motor

Single-phase motors are not suitable for being operated by an AC Motor Drive. Please use a 3-phase motor instead when necessary.

### Environmental Conditions

#### Installation Position

1. The drive is suitable for installation in a place with ambient temperature from -10 to 50°C.
2. The surface temperature of the drive and brake resistor will rise under specific operation conditions. Therefore, please install the drive on materials that are noncombustible.
3. Ensure that the installation site complies with the ambient conditions as stated in the manual.

### Wiring

#### Limit of Wiring Distance

For remote operation, please use twist-shielding cable and the distance between the drive and control box should be less than 20m.

#### Maximum Motor Cable Length

Motor cables that are too long may cause overheating of the drive or current peaks due to stray capacitance. Please ensure that the motor cable is less than 30m. If the cable length can't be reduced, please lower the carrier frequency or use an AC reactor.

#### Choose the Right Cable

Please refer to current value to choose the right cable section with enough capacity or use recommended cables.

#### Grounding

Please ground the drive completely by using the grounding terminal.

### How to Choose the Drive Capacity

#### Standard Motor

Please select the drive according to applicable motor rated current listed in the drive specification.

Please select the next higher power AC drive in case higher starting torque or quick acceleration/deceleration is needed.

#### Special Motor

Please select the drive according to: Rated current of the drive > rated current of the motor

### Transportation and Storage

Please transport and store the drive in a place that meets environment specifications.

### Peripheral Equipment

#### Molded-Case Circuit Breakers (MCCB)

Please install the recommended MCCB or ELCB in the main circuit of the drive and make sure that the capacity of the breaker is equal to or lower than the recommended one.

#### Add a Magnetic Contactor(MC) in the Output Circuit

When a MC is installed in the output circuit of the drive to switch the motor to commercial power or other purposes, please make sure that the drive and motor are completely stopped and remove the surge absorbers from the MC before switching it.

#### Add a Magnetic Contactor (MC) in the Input Circuit

Please only switch the MC ONCE per hour or it may damage the drive. Please use RUN/STOP signal to switch many times during motor operation.

#### Motor Protection

The thermal protection function of the drive can be used to protect the motor by setting the operation level and motor type (standard motor or variable motor). When using a high-speed motor or a water-cooled motor the thermal time constant should be set to a lower value.

When using a longer cable to connect the motor thermal relay to a motor, high-frequency currents may enter via the stray capacitance. It may result in malfunctioning of the relay as the real current is lower than the setting of thermal relay. Under this condition, please lower the carrier frequency or add an AC reactor to solve this.

#### DO NOT Use Capacitors to Improve the Power Factor

Use a DC reactor to improve the power factor of the drive. Please DO NOT install power factor correction capacitors on the main circuit of the drive to prevent motor faults due to over current.

#### Do NOT Use Surge Absorber

Please DO NOT install surge absorbers on the output circuit of the drive.

#### Lower the Noise

To ensure compliance with EMC regulations, usually a filter and shielded wiring is used to lower the noise.

#### Method Used to Reduce the Surge Current

Surge currents may occur in the phase-lead capacitor of the power system, causing an overvoltage when the drive is stopped or at low loads.

It is recommended to add a DC reactor to the drive.





Smarter. Greener. Together.

## Industrial Automation Headquarters

### **Delta Electronics, Inc.**

Taoyuan Technology Center  
No.18, Xinglong Rd., Taoyuan District,  
Taoyuan City 33068, Taiwan  
TEL: 886-3-362-6301 / FAX: 886-3-371-6301

### **Asia**

#### **Delta Electronics (Shanghai) Co., Ltd.**

No.182 Minyu Rd., Pudong Shanghai, P.R.C.  
Post code : 201209  
TEL: 86-21-6872-3988 / FAX: 86-21-6872-3996  
Customer Service: 400-820-9595

#### **Delta Electronics (Japan), Inc.**

Tokyo Office  
Industrial Automation Sales Department  
2-14 Shibadaimon, Minato-ku  
Tokyo, Japan 105-0012  
TEL: 81-3-5733-1155 / FAX: 81-3-5733-1255

#### **Delta Electronics (Korea), Inc.**

Seoul Office  
1511, 219, Gasan Digital 1-Ro., Geumcheon-gu,  
Seoul, 08501 South Korea  
TEL: 82-2-515-5305 / FAX: 82-2-515-5302

#### **Delta Energy Systems (Singapore) Pte Ltd.**

4 Kaki Bukit Avenue 1, #05-04, Singapore 417939  
TEL: 65-6747-5155 / FAX: 65-6744-9228

#### **Delta Electronics (India) Pvt. Ltd.**

Plot No.43, Sector 35, HSIIDC Gurgaon,  
PIN 122001, Haryana, India  
TEL: 91-124-4874900 / FAX : 91-124-4874945

#### **Delta Electronics (Thailand) PCL.**

909 Soi 9, Moo 4, Bangpoo Industrial Estate (E.P.Z),  
Pattana 1 Rd., T.Phraaksa, A.Muang,  
Samutprakarn 10280, Thailand  
TEL: 66-2709-2800 / FAX : 662-709-2827

#### **Delta Electronics (Australia) Pty Ltd.**

Unit 20-21/45 Normanby Rd., Notting Hill Vic 3168, Australia  
TEL: 61-3-9543-3720

### **Americas**

#### **Delta Electronics (Americas) Ltd.**

Raleigh Office  
P.O. Box 12173, 5101 Davis Drive,  
Research Triangle Park, NC 27709, U.S.A.  
TEL: 1-919-767-3813 / FAX: 1-919-767-3969

#### **Delta Greentech (Brasil) S/A**

São Paulo Office  
Rua Itapeva, 26 – 3° Andar - Bela Vista  
CEP: 01332-000 – São Paulo – SP - Brasil  
TEL: 55-11-3530-8643 / 55-11-3530-8640

#### **Delta Electronics International Mexico S.A. de C.V.**

Mexico Office  
Gustavo Baz No. 309 Edificio E PB 103  
Colonia La Loma, CP 54060  
Tlalnepantla, Estado de México  
TEL: 52-55-3603-9200

### **EMEA**

#### **Headquarters: Delta Electronics (Netherlands) B.V.**

Sales: Sales.IA.EMEA@deltaww.com  
Marketing: Marketing.IA.EMEA@deltaww.com  
Technical Support: iatechnicalsupport@deltaww.com  
Customer Support: Customer-Support@deltaww.com  
Service: Service.IA.emea@deltaww.com  
TEL: +31(0)40 800 3900

#### **BENELUX: Delta Electronics (Netherlands) B.V.**

De Witbogt 20, 5652 AG Eindhoven, The Netherlands  
Mail: Sales.IA.Benelux@deltaww.com  
TEL: +31(0)40 800 3900

#### **DACH: Delta Electronics (Netherlands) B.V.**

Coesterweg 45, D-59494 Soest, Germany  
Mail: Sales.IA.DACH@deltaww.com  
TEL: +49(0)2921 987 0

#### **France: Delta Electronics (France) S.A.**

ZI du bois Challand 2, 15 rue des Pyrénées,  
Lisses, 91090 Evry Cedex, France  
Mail: Sales.IA.FR@deltaww.com  
TEL: +33(0)1 69 77 82 60

#### **Iberia: Delta Electronics Solutions (Spain) S.L.U**

Ctra. De Villaverde a Vallecas, 265 1º Dcha Ed.  
Hormigueras – P.I. de Vallecas 28031 Madrid  
TEL: +34(0)91 223 74 20

Carrer Llacuna 166, 08018 Barcelona, Spain

Mail: Sales.IA.Iberia@deltaww.com

#### **Italy: Delta Electronics (Italy) S.r.l.**

Via Meda 2-22060 Novedrate(CO)  
Piazza Grazioli 18 00186 Roma Italy  
Mail: Sales.IA.Italy@deltaww.com  
TEL: +39 039 8900365

#### **Russia: Delta Energy System LLC**

Vereyskaya Plaza II, office 112 Vereyskaya str.  
17 121357 Moscow Russia  
Mail: Sales.IA.RU@deltaww.com  
TEL: +7 495 644 3240

#### **Turkey: Delta Greentech Elektronik San. Ltd. Sti. (Turkey)**

Serifali Mah. Hendem Cad. Kule Sok. No:16-A  
34775 Ümraniye – İstanbul  
Mail: Sales.IA.Turkey@deltaww.com  
TEL: + 90 216 499 9910

#### **GCC: Delta Energy Systems AG (Dubai BR)**

P.O. Box 185668, Gate 7, 3rd Floor, Hamarain Centre  
Dubai, United Arab Emirates  
Mail: Sales.IA.MEA@deltaww.com  
TEL: +971(0)4 2690148

#### **Egypt + North Africa: Delta Electronics**

Unit 318, 3rd Floor, Trivium Business Complex, North 90 street,  
New Cairo, Cairo, Egypt  
Mail: Sales.IA.MEA@deltaww.com