




BH03L Fuse Holder

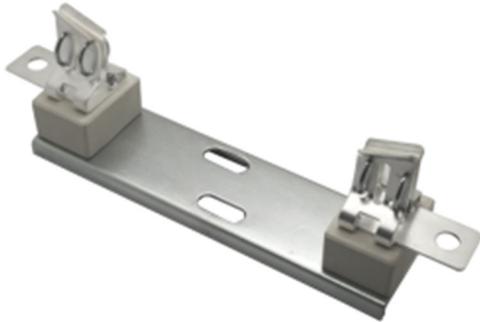

Features

- Rated Voltage: 1500 Vdc
- Rated Current: 500 A
- Short Circuit Current Rating (SCCR): 50kA
- Uimp: 3.8kV
- Max. Power Withstand Rating: 90W
- Standard: Reference to UL4248
- Designed for ADLER AX7, AX8 Fuse Links
- Material:


Fuse Clip: Silver Plated Copper

Backing Spring: Zinc Plated Steel

Mounting Base: Zinc Plated Steel

Insulator: Ceramic

Dimensions (mm)

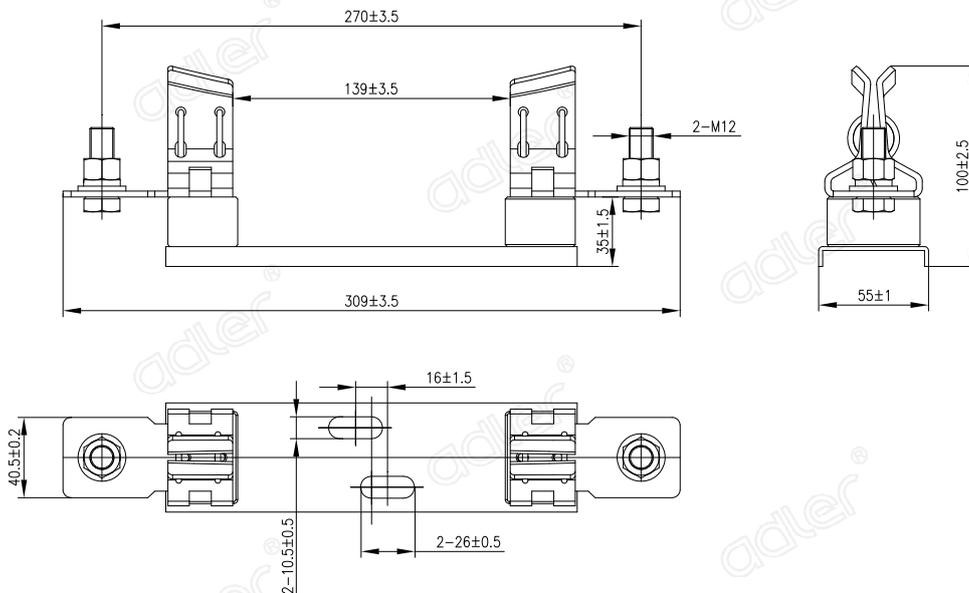

Installation Notes

- Recommended Torque:

Mounting Base: 15 N·m

Terminal Screw(M10): 15 N·m

- Operating Temperature: -40°C to +90°C
- Storage Temperature: -40°C to +70°C
- Be aware of surface condensation phenomenon in case of temperature changes.
- Class III pollution index for fuse links.
- Avoid exposure to gas or oxidizing chemicals that could cause metal corrosions and accumulation of dust particles, which may affect the insulation material.

Web Resources

Download the latest technical documents: www.adlerelectric.com. Specifications are subject to change without notice.