



adler®

BH600/BH601 2000 Vdc Fuse Holder



FEATURES

Adler BH600/BH601 touch safe fuse holders are designed for all standard 22X85mm PV fuses such as ADLER A96 series. With current ratings up to 60A at 2000 Vdc, this holder provides the most compact and effective solution to protect 2000 Vdc circuits and equipment in photovoltaic applications.

Note: SCCR is limited to the interrupting rating of the installed fuse or 30 KA, whichever is less.


DESCRIPTION

Adler BH600/BH601 touch safe holders are designed especially for use with 22X85mm fuse links. Only BH601 touch safe holder has an indicator light.

SPECIFICATIONS

- Rated Voltage: 2000 Vdc
- Rated Current: Up to 60A
- Short Circuit Current Rating (SCCR): DC 30 kA
- Max. Heat Dissipation: 12.5W
- Material Flammability: UL 94-V0
- Mounting: DIN Rail mounting
- Max. Torque: 4 N.m
- Wire Range: 2-12AWG
- Temperature Tolerance (RTIstr): -40°C to +90°C

DIMENSIONS (mm)

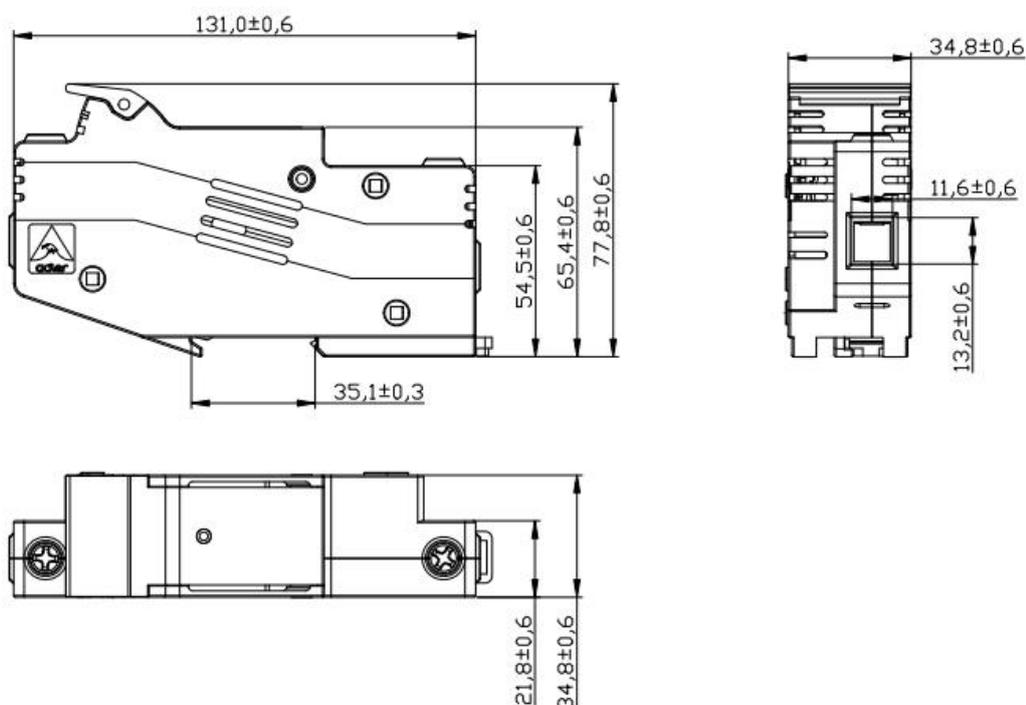

WEB RESOURCES

Download the latest technical documents: www.adlerelectric.com. Specifications are subject to change without notice.